


OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSION ITEMS

Symbol	Definition and Description
L1	Horizontal distance from datum point to rearmost point of power unit
L2	Horizontal distance from datum point to forefront (depend on the model) of power unit
L3	Distance from datum point to farthest point on tiller handle, when the handle is in horizontal position (in use)
L4	Horizontal distance from datum point to rearmost point of the lower case
L5	Minimum distance from transom board or its extension to forefront of the lower case, with motor fully trimmed down and steered to the full
L6	Horizontal distance from datum point to rearmost point of protrusion when motor is tilted up (over-tilt position)
L7	Horizontal distance from datum point to protruded forefront when motor is tilted up (over-tilt position)
L8	Horizontal distance from datum point to lowest point of protrusion when motor is tilted up (over-tilt position)
L9	Horizontal forward protrusion of lower case from the datum line when PT/T is fully trimmed down
L10	Horizontal distance from datum point to bracket shaft (bolt) center
H1	Vertical distance from datum point to lowest point of motor
H2	Vertical distance from datum point to highest point of power head
H3	Vertical distance from cavitation plate undersurface to propeller shaft
H4	Vertical distance from datum point to cavitation plate undersurface
H5	Vertical distance from datum point to tiller handle tip when the handle is in vertical position
H6	Vertical distance from skeg tip at H1 to the lowest point of lower unit when motor is tilted up (over-tilt position)
H7	Vertical distance from datum line to protruded forefront when motor is tilted up (over-tilt position)
H8	Vertical distance from datum line to lowest point of protrusion when motor is tilted up (over-tilt position)
H9	Vertical distance to the highest point of the motor when it is tilted up (over-tilt position)
H10	Vertical distance from datum point to bracket shaft (bolt) center
H11	Difference in the height of lower unit lowest point comparing the height in the standard position and with PT/T in the fully trimmed down position.
W1	Leftward protrusion from center line of motor body when looking at the front face
W2	Distance from tiller handle tip to centerline of motor body when looking at the front face
W3	Distance from centerline to left or right edge of motor body, except for levers and handles
W4	Distance from centerline to left or right end of motor body protrusion, except for levers and handles
W5	Distance from centerline to the farthest point on the body when steered to the maximum angle
W6	Distance from centerline to the farthest point on the tiller handle when steered to the maximum angle
A1	Maximum steering angle each way (symmetrical), from centerline of motor body
A2	Tilt up angle (whole rotating range to over-tilt angle including negative trim angle)
A3	Maximum negative trim angle from the vertical line through the datum point
T1	Centerline-to-centerline minimum distance of the motors in case of twin installation

OUTBOARD MOTOR DIMENSIONS
OVERALL DIMENSION ITEMS

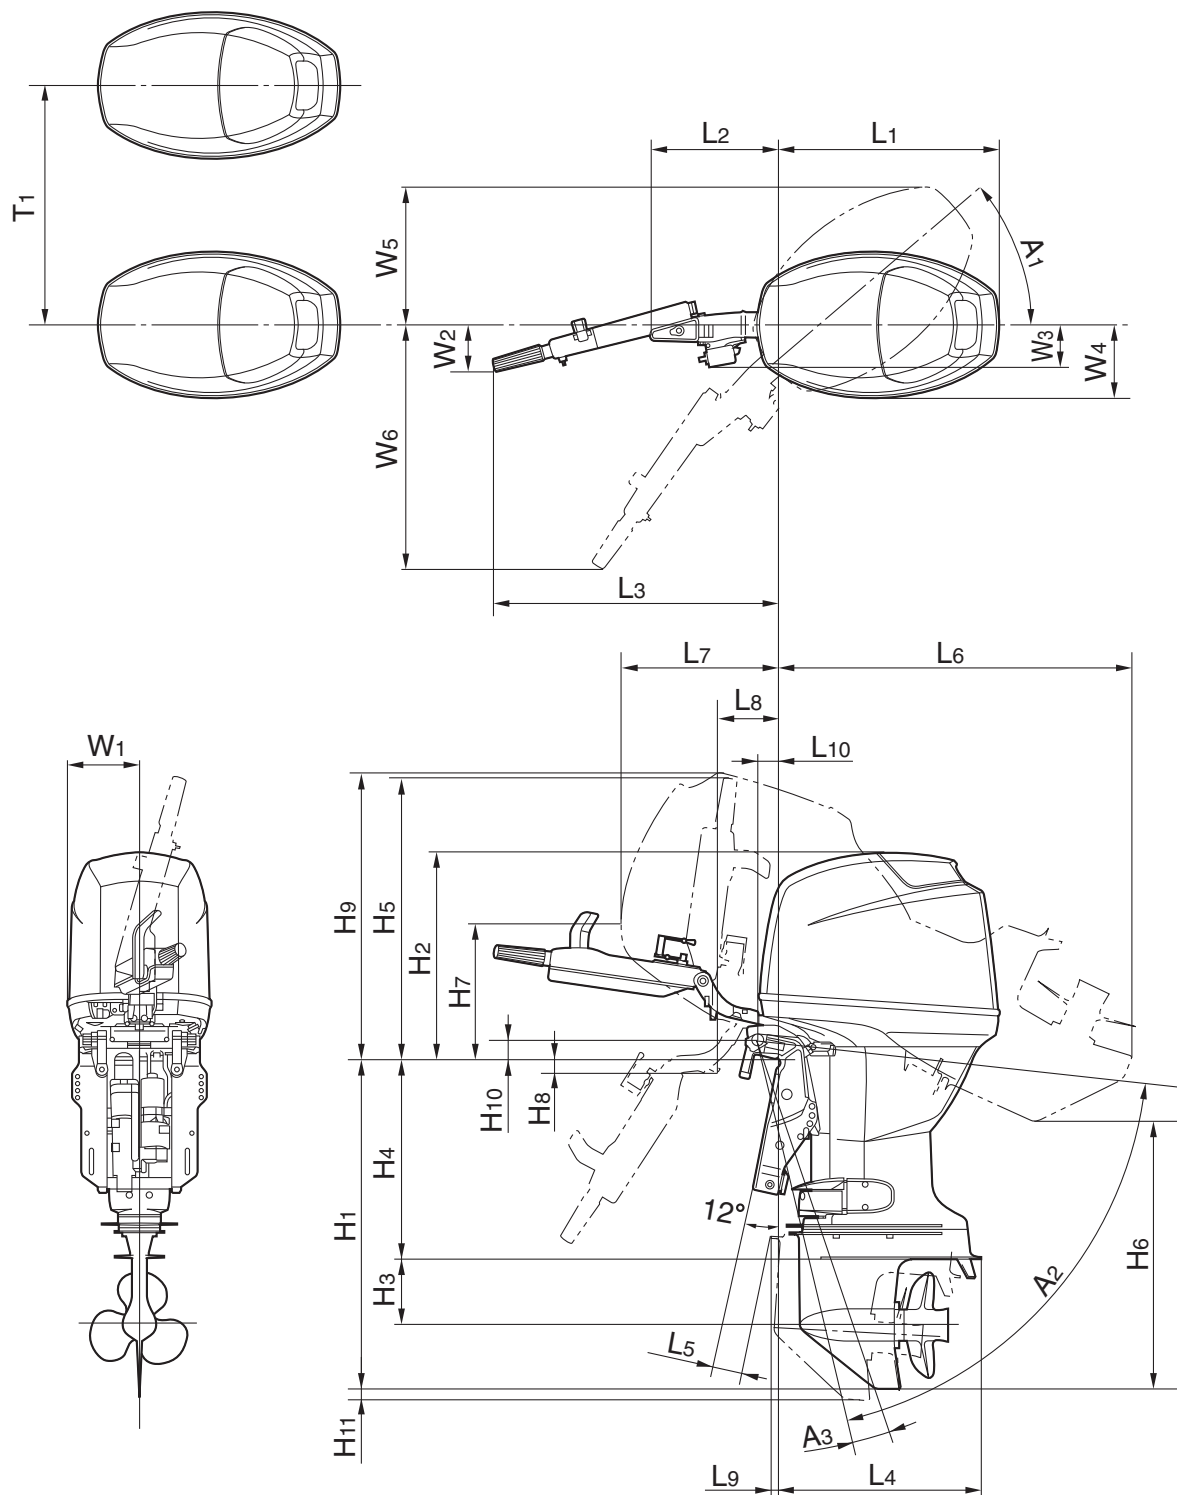

OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSIONS (2-STROKE)

Global model (US, CA model)		2CMH	3AMH	4ACMH 5CMH	5CSMH	6CMH (6MH) 8CMH (8MH)	E8DMH EK8DMH	9.9FMH (9.9MH) 15FMH (15MH)	E9.9DMH E15DMH EK9.9DMH EK15DMH EK9.9JMH EK15PMH
Symbol									
L1	mm (in.)	275 (10.8)	311 (12.2)	344 (13.5)	344 (13.5)	363 (14.3)	346 (13.6)	393 (15.5)	405 (15.9)
L2	mm (in.)	122 (4.8)	107 (4.2)	145 (5.7)	145 (5.7)	114 (4.5)	180 (7.1)	180 (7.1)	165 (6.5)
L3	mm (in.)	328 (12.9)	317 (12.5)	333 (13.1)	333 (13.1)	439 (17.3)	372 (14.6)	479 (18.9)	473 (18.6)
L4	mm (in.)	164 (6.5)	223 (8.8)	252 (9.9)	252 (9.9)	359 (14.1)	268 (10.6)	355 (14.0)	357 (14.0)
L5	S	mm (in.)	34 (1.3)	16 (0.6)	16 (0.6)	121 (4.8)	23 (0.9)	78 (3.1)	79 (3.1)
	L		—	16 (0.6)	24 (0.9)	126 (5.0)	23 (0.9)	104 (4.1)	78 (3.1)
	Y		—	—	—	—	—	—	—
	X		—	—	—	126 (5.0)	23 (0.9)	—	78 (3.1)
	U		—	—	—	—	—	134 (5.3)	—
L6	S	mm (in.)	589 (23.2)	636 (25.0)	635 (25.0)	705 (27.8)	657 (25.9)	718 (28.3)	708 (27.9)
	L		—	760 (29.9)	758 (29.8)	826 (32.5)	782 (30.8)	831 (32.7)	—
	Y		—	—	—	—	—	—	—
	X		—	—	—	887 (34.9)	827 (32.6)	—	947 (37.3)
	U		—	—	—	—	—	957 (37.7)	—
L7	mm (in.)	276 (10.9)	311 (12.2)	331 (13.0)	331 (13.0)	287 (11.3)	354 (13.9)	314 (12.4)	334 (13.1)
L8	mm (in.)	142 (5.6)	156 (6.1)	148 (5.8)	148 (5.8)	154 (6.1)	207 (8.1)	263 (10.4)	165 (6.5)
L9	S	mm (in.)	—	—	—	—	—	—	—
	L		—	—	—	—	—	—	4 (0.2)
	Y		—	—	—	—	—	—	—
	X		—	—	—	—	—	—	14 (0.6)
	U		—	—	—	—	—	—	—
L10	mm (in.)	50 (2.0)	68 (2.7)	68 (2.7)	68 (2.7)	65 (2.5)	45 (1.8)	75 (3.0)	73 (2.9)
H1	S	mm (in.)	614 (24.2)	654 (25.7)	653 (25.7)	682 (26.9)	685 (27.0)	705 (27.8)	706 (27.8)
	L		—	781 (30.7)	780 (30.7)	809 (31.9)	825 (32.5)	832 (32.8)	833 (32.8)
	Y		—	—	—	—	—	—	—
	X		—	—	—	872 (34.3)	875 (34.4)	—	975 (38.4)
	U		—	—	—	—	—	974 (38.3)	—
H2	mm (in.)	302 (11.9)	343 (13.5)	358 (14.1)	325 (12.8)	295 (11.6)	359 (14.1)	335 (13.2)	356 (14.0)
H3	mm (in.)	100 (3.9)	103 (4.1)	105 (4.1)	105 (4.1)	123 (4.8)	122 (4.8)	135 (5.3)	34 (1.4)
H4	S	mm (in.)	417 (16.4)	441 (17.4)	444 (17.5)	444 (17.5)	436 (17.2)	442 (17.4)	440 (17.3)
	L		—	568 (22.4)	571 (22.5)	571 (22.5)	563 (22.2)	582 (22.9)	567 (22.3)
	Y		—	—	—	—	—	—	—
	X		—	—	—	626 (24.6)	632 (24.9)	—	710 (28.0)
	U		—	—	—	—	—	709 (27.9)	—
H5	mm (in.)	462 (18.2)	484 (19.1)	396 (15.6)	396 (15.6)	462 (18.2)	415 (16.3)	467 (18.4)	474 (18.7)
H6	S	mm (in.)	503 (19.8)	621 (24.4)	623 (24.5)	623 (24.5)	668 (26.3)	497 (19.6)	572 (22.5)
	L		—	717 (28.2)	719 (28.3)	719 (28.3)	758 (29.8)	574 (22.6)	641 (25.2)
	Y		—	—	—	—	—	—	—
	X		—	—	—	803 (31.6)	601 (23.7)	—	714 (28.1)
	U		—	—	—	—	—	718 (28.3)	—
H7	mm (in.)	38 (1.5)	342 (13.5)	104 (4.1)	104 (4.1)	110 (4.3)	86 (3.4)	138 (5.4)	—
H8	mm (in.)	12 (0.5)	9.0 (0.35)	30 (1.2)	30 (1.2)	2.0 (0.08)	51 (2.0)	19 (0.7)	24 (0.9)
H9	mm (in.)	397 (15.6)	419 (16.5)	459 (18.1)	459 (18.1)	470 (18.5)	465 (18.3)	526 (20.7)	555 (21.9)
H10	mm (in.)	27 (1.0)	30 (1.2)	30 (1.2)	30 (1.2)	32 (1.3)	26 (1.0)	34 (1.3)	34 (1.4)
H11	S	mm (in.)	—	—	—	—	—	—	—
	L		—	—	—	—	—	—	—
	Y		—	—	—	—	—	—	—
	X		—	—	—	—	—	—	—
	U		—	—	—	—	—	—	—
W1	mm (in.)	151 (5.9)	108 (4.3)	144 (5.7)	144 (5.7)	150 (5.9)	136 (5.4)	143 (5.6)	173 (6.8)
W2	mm (in.)	125 (4.9)	181 (7.1)	178 (7.0)	178 (7.0)	193 (7.6)	192 (7.6)	189 (7.4)	—
W3	mm (in.)	89 (3.5)	105 (4.1)	134 (5.3)	134 (5.3)	137 (5.4)	129 (5.1)	143 (5.6)	—
W4	mm (in.)	—	—	—	—	—	158 (6.2)	—	185 (7.3)
W5	mm (in.)	—	—	—	—	283 (11.1)	—	280 (11.0)	280 (11.0)
W6	mm (in.)	—	—	—	—	551 (21.7)	—	497 (19.6)	493 (19.4)
A1	degree	360	360	360	360	60	360	45(P)/40(S)	40
A2	degree	73	76	76	76	81	80	63	63
A3	degree	—	—	—	—	—	—	—	4
T1	mm (in.)	—	—	—	—	—	—	—	—

OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSIONS (2-STROKE)

Global model (US, CA model)		Symbol	20DMH (20MH) 20DMHO 25NWC 25NMH (25MH) 25NMHO	E/25BMH 25BWH 25BWC 25XMH E/30HMH 30HWH 30HWC EK25BMH EK25CMH	25BW 30HW	30DMH 30DMHO	30DEO	30DETO	E40GWH E40GMH EK40GMH	E/40JMH E/40JWH EK40JMH
L1		mm (in.)	428 (16.9)	429 (16.89)	429 (16.89)	465 (18.3)	465 (18.3)	489 (19.25)	504 (19.8)	504 (19.8)
L2		mm (in.)	185 (7.3)	180 (7.09)	180 (7.09)	198 (7.8)	114 (4.5)	89 (3.5)	188 (7.4)	188 (7.4)
L3		mm (in.)	508 (20.0)	420 (16.5)	—	497 (19.6)	—	—	493 (19.4)	493 (19.4)
L4		mm (in.)	402 (15.8)	385 (15.16)	385 (15.16)	496 (19.5)	496 (19.5)	520 (20.5)	421 (16.6)	421 (16.6)
L5	S	mm (in.)	79 (3.1)	61 (2.40)	83 (3.27)	85 (3.3)	85 (3.3)	—	94 (3.7)	94 (3.7)
	L		106 (4.2)	83 (3.27)	—	90 (3.5)	90 (3.5)	103 (4.1)	94 (3.7)	94 (3.7)
	Y		117 (4.6)	83 (3.27)	—	—	99 (3.9)	—	94 (3.7)	94 (3.7)
	X		116 (4.6)	83 (3.27)	—	—	—	—	—	—
	U		—	—	—	—	—	—	—	—
L6	S	mm (in.)	739 (29.1)	736 (28.98)	854 (33.62)	752 (29.6)	752 (29.6)	—	784 (30.9)	784 (30.9)
	L		852 (33.5)	854 (33.62)	—	859 (33.8)	859 (33.8)	870 (34.2)	897 (35.3)	897 (35.3)
	Y		898 (35.4)	897 (35.31)	—	—	895 (35.2)	—	943 (37.1)	943 (37.1)
	X		931 (36.7)	933 (36.73)	—	—	—	—	—	—
	U		—	—	—	—	—	—	—	—
L7		mm (in.)	337 (13.3)	405 (15.94)	405 (15.94)	387 (15.2)	375 (14.8)	356 (14.0)	427 (16.8)	427 (16.8)
L8		mm (in.)	242 (9.5)	195 (7.68)	195 (7.68)	228 (9.0)	173 (6.8)	158 (6.2)	193 (7.6)	193 (7.6)
L9	S	mm (in.)	—	—	—	—	—	—	—	—
	L		—	—	—	—	—	—	—	—
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	—	—	—	—	—
	U		—	—	—	—	—	—	—	—
L10		mm (in.)	78 (3.1)	74.2 (2.9)	74.2 (2.92)	73 (2.9)	73 (2.9)	65 (2.6)	72 (2.8)	72 (2.8)
H1	S	mm (in.)	703 (27.7)	707 (27.83)	834 (32.83)	712 (28.0)	712 (28.0)	—	771 (30.4)	771 (30.4)
	L		830 (32.7)	834 (32.83)	—	833 (32.8)	833 (32.8)	835 (32.9)	898 (35.4)	898 (35.4)
	Y		881 (34.7)	881 (34.68)	—	872 (34.3)	874 (34.4)	—	948 (37.3)	948 (37.3)
	X		919 (36.2)	920 (36.22)	—	—	—	—	—	—
	U		—	—	—	—	—	—	—	—
H2		mm (in.)	365 (14.4)	439 (17.28)	439 (17.28)	446 (17.6)	428 (16.9)	426 (16.8)	444 (17.5)	444 (17.5)
H3		mm (in.)	144 (5.7)	144 (5.67)	144 (5.67)	148 (5.8)	148 (5.8)	148 (5.8)	162 (6.4)	162 (6.4)
H4	S	mm (in.)	419 (16.5)	423 (16.65)	550 (21.65)	424 (16.7)	424 (16.7)	—	444 (17.5)	444 (17.5)
	L		546 (21.5)	550 (21.65)	—	545 (21.5)	545 (21.5)	547 (21.5)	570 (22.4)	570 (22.4)
	Y		597 (23.5)	597 (23.50)	—	584 (23.0)	586 (23.1)	—	622 (24.5)	622 (24.5)
	X		635 (25.0)	636 (25.04)	—	—	—	—	—	—
	U		—	—	—	—	—	—	—	—
H5		mm (in.)	491 (19.3)	466 (18.3)	—	445 (17.5)	—	—	533 (21.0)	533 (21.0)
H6	S	mm (in.)	586 (23.1)	621 (24.45)	701 (27.60)	584 (23.0)	584 (23.0)	—	622 (24.5)	622 (24.5)
	L		655 (25.8)	701 (27.60)	—	648 (25.5)	648 (25.5)	651 (25.6)	691 (27.2)	691 (27.2)
	Y		684 (26.9)	730 (28.74)	—	668 (26.3)	670 (26.4)	—	719 (28.3)	719 (28.3)
	X		704 (27.7)	754 (29.68)	—	—	—	—	—	—
	U		—	—	—	—	—	—	—	—
H7		mm (in.)	186 (7.3)	118 (4.65)	118 (4.65)	278 (10.9)	224 (8.8)	244 (9.6)	127 (5.0)	127 (5.0)
H8		mm (in.)	24 (0.9)	30 (1.18)	30 (1.18)	29 (1.1)	9.0 (0.35)	8.7 (0.3)	30 (1.2)	30 (1.2)
H9		mm (in.)	584 (23.0)	596 (23.46)	596 (23.46)	657 (25.9)	647 (25.5)	661 (26.0)	695 (27.4)	695 (27.4)
H10		mm (in.)	41 (1.6)	40 (1.6)	40.3 (1.59)	44 (1.7)	44 (1.7)	42 (16.5)	45 (1.8)	45 (1.8)
H11	S	mm (in.)	—	—	—	—	—	—	—	—
	L		—	—	—	—	—	22 (0.87)	—	—
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	—	—	—	—	—
	U		—	—	—	—	—	—	—	—
W1		mm (in.)	—	166 (6.54)	166 (6.54)	—	154 (6.1)	154 (6.1)	190 (7.5)	190 (7.5)
W2		mm (in.)	206 (8.1)	233 (9.2)	—	208 (8.2)	—	152 (6.0)	294 (11.6)	294 (11.6)
W3		mm (in.)	152 (6.0)	148 (5.83)	148 (5.83)	152 (6.0)	—	—	173 (6.8)	173 (6.8)
W4		mm (in.)	177 (7.0)	192 (7.56)	192 (7.56)	179 (7.0)	—	—	205 (8.1)	205 (8.1)
W5		mm (in.)	296 (11.7)	302 (11.89)	302 (11.89)	310 (12.2)	310 (12.2)	310 (12.2)	360 (14.2)	360 (14.2)
W6		mm (in.)	528 (20.8)	472 (18.6)	217 (8.54)	522 (20.6)	—	—	602 (23.7)	602 (23.7)
A1		degree	40	40	40	40	40	40	45	45
A2		degree	67	68	68	70	70	61	67	67
A3		degree	—	—	—	—	—	4	—	—
T1		mm (in.)	—	—	—	—	—	—	—	—

OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSIONS (2-STROKE)

Global model (US, CA model)		Symbol	E40JW	E/40XMH E/40XWH	E/40XW	E/40XWT	40VMHO 50HMH0	40VEO	40VETO 50HET 50HETO (50TR)	40VMHD 40VWHDO 40VWHTO 50HMH 50HWH 50HWHTO
L1	mm (in.)		504 (19.8)	533 (21.8)	553 (21.8)	533 (21.8)	490 (19.3)	490 (19.3)	528 (20.8)	528 (20.8)
L2	mm (in.)		188 (7.4)	118 (4.6)	118 (4.6)	118 (4.6)	257 (10.1)	178 (7.0)	142 (5.6)	221 (8.7)
L3	mm (in.)		—	523 (20.6)	—	—	789 (31.1)	—	—	753 (29.6)
L4	mm (in.)		478 (18.8)	522 (20.6)	522 (20.6)	522 (20.6)	493 (19.4)	493 (19.4)	529 (20.8)	529 (20.8)
L5	S	mm (in.)	94 (3.7)	65 (2.6)	65 (2.6)	91 (3.6)	—	—	78 (3.1)	—
	L		—	91 (3.6)	91 (3.6)	—	—	—	77 (3.0)	77 (3.0)
	Y		—	91 (3.6)	—	—	—	—	—	—
	X		—	—	—	—	—	—	77 (3.0)	—
	U		—	—	—	—	—	—	—	—
L6	S	mm (in.)	797 (31.4)	826 (32.5)	826 (32.5)	—	798 (31.4)	798 (31.4)	822 (32.4)	—
	L		910 (35.8)	940 (37.0)	940 (37.0)	935 (36.8)	910 (35.8)	910 (35.8)	937 (36.9)	937 (36.9)
	Y		—	1,043 (41.1)	—	—	—	—	—	—
	X		—	—	—	1,020 (40.2)	—	—	1,040 (40.9)	—
	U		—	—	—	—	—	—	—	—
L7	mm (in.)		427 (16.8)	397 (15.6)	397 (15.6)	391 (15.4)	433 (17.0)	401 (15.8)	387 (15.2)	418 (16.5)
L8	mm (in.)		193 (7.6)	294 (11.6)	—	—	273 (10.7)	179 (7.0)	153 (6.0)	246 (9.7)
L9	S	mm (in.)	—	3 (0.1)	3 (0.1)	—	—	—	-11 (-0.43)	—
	L		—	8 (0.3)	8 (0.3)	8 (0.3)	—	—	10 (0.4)	10 (0.4)
	Y		—	16 (0.6)	—	—	—	—	—	—
	X		—	—	—	16 (0.6)	—	—	—	—
	U		—	—	—	—	—	—	—	—
L10	mm (in.)		72 (2.8)	65 (2.6)	65 (2.6)	65 (2.6)	72 (2.8)	72 (2.8)	63 (2.5)	63 (2.5)
H1	S	mm (in.)	764 (30.1)	767 (30.2)	767 (30.2)	—	751 (29.6)	751 (29.6)	753 (29.6)	—
	L		—	893 (35.2)	893 (35.2)	893 (35.2)	878 (34.6)	878 (34.6)	880 (34.6)	880 (34.6)
	Y		—	1,007 (39.6)	—	—	—	—	—	—
	X		—	—	—	1,007 (39.6)	—	—	994 (39.1)	—
	U		—	—	—	—	—	—	—	—
H2	mm (in.)		444 (17.5)	471 (18.5)	471 (18.5)	471 (18.5)	472 (18.6)	441 (17.4)	439 (17.3)	470 (18.5)
H3	mm (in.)		175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)
H4	S	mm (in.)	421 (16.6)	424 (16.7)	424 (16.7)	—	408 (16.1)	408 (16.1)	410 (16.1)	—
	L		—	550 (21.7)	550 (21.7)	550 (21.7)	535 (21.1)	535 (21.1)	537 (21.1)	537 (21.1)
	Y		—	649 (25.6)	—	—	—	—	—	—
	X		—	—	—	649 (25.6)	—	—	651 (25.6)	—
	U		—	—	—	—	—	—	—	—
H5	mm (in.)		533 (21.0)	—	—	532 (20.9)	731 (28.8)	—	—	728 (28.7)
H6	S	mm (in.)	614 (24.2)	626 (24.6)	626 (24.6)	—	579 (22.8)	579 (22.8)	635 (25.0)	—
	L		—	697 (27.4)	697 (27.4)	637 (25.1)	646 (25.4)	646 (25.4)	709 (27.9)	709 (27.9)
	Y		—	753 (29.6)	—	—	—	—	—	—
	X		—	—	—	709 (27.9)	—	—	775 (30.5)	—
	U		—	—	—	—	—	—	—	—
H7	mm (in.)		127 (5.0)	159 (6.3)	159 (6.3)	176 (6.9)	201 (7.9)	217 (8.5)	222 (8.7)	204 (8.0)
H8	mm (in.)		30 (1.2)	38 (1.5)	—	—	55 (2.2)	17 (0.7)	0.0 (0.00)	43 (1.7)
H9	mm (in.)		695 (27.4)	702 (27.6)	702 (27.6)	706 (27.8)	683 (26.9)	671 (26.4)	688 (27.1)	696 (27.4)
H10	mm (in.)		45 (1.8)	43 (1.69)	43 (1.69)	43 (1.69)	44 (1.7)	44 (1.7)	44 (1.7)	44 (1.7)
H11	S	mm (in.)	—	25 (0.98)	25 (0.98)	—	—	—	20 (0.8)	—
	L		—	24 (0.94)	24 (0.94)	24 (0.94)	—	—	19 (0.7)	19 (0.7)
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	55 (2.2)	—	—	—	—
	U		—	—	—	—	—	—	—	—
W1	mm (in.)		190 (7.5)	182 (7.2)	182 (7.2)	182 (7.2)	—	180 (7.1)	180 (7.1)	180 (7.1)
W2	mm (in.)		—	220.5 (8.7)	—	—	124 (4.9)	—	—	124 (4.9)
W3	mm (in.)		173 (6.8)	182 (7.2)	182 (7.2)	182 (7.2)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)
W4	mm (in.)		205 (8.1)	—	—	—	—	180 (7.1)	180 (7.1)	180 (7.1)
W5	mm (in.)		360 (14.2)	369 (14.5)	369 (14.5)	369 (14.5)	340 (13.4)	340 (13.4)	340 (13.4)	340 (13.4)
W6	mm (in.)		602 (23.7)	592 (23.3)	—	—	641 (25.2)	—	—	641 (25.2)
A1	degree		45	42	42	42	40	40	40	40
A2	degree		67	64	64	61	62	62	65	65
A3	degree		—	—	—	4	—	—	4	4
T1	mm (in.)		—	—	—	—	—	—	—	—

OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSIONS (2-STROKE)

Global model (US, CA model)		Symbol	E48CMH E55CMH	55BED S-transom	55BED L-transom	55BET	55DEHD	E60HMHD E60HWHD	E60HWD	60FED 60FEDO S-transom
L1		mm (in.)	487 (19.2)	531 (20.9)	516 (20.3)	516 (20.3)	545 (21.5)	532 (20.9)	532 (20.9)	547 (21.5)
L2		mm (in.)	298 (11.7)	159 (6.3)	174 (6.9)	174 (6.9)	180 (7.1)	269 (10.6)	269 (10.6)	151 (5.9)
L3		mm (in.)	680 (26.8)	—	—	—	790 (31.1)	651 (25.6)	651 (25.6)	—
L4		mm (in.)	487 (19.2)	531 (20.9)	516 (20.3)	516 (20.3)	547 (21.5)	546 (21.5)	546 (21.5)	562 (22.1)
L5	S	mm (in.)	54 (2.1)	87 (3.4)	—	—	—	97 (3.8)	—	113 (4.4)
	L		71 (2.8)	—	90 (3.5)	90 (3.5)	88 (3.5)	99 (3.9)	99 (3.9)	—
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	79 (3.1)	85 (3.3)	—	—	—
	U		—	—	—	—	—	—	—	—
L6	S	mm (in.)	827 (32.6)	818 (32.2)	—	—	—	913 (35.9)	—	868 (34.2)
	L		932 (36.7)	—	919 (36.2)	919 (36.2)	968 (38.1)	1,020 (40.2)	1,020 (40.2)	—
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	1,033 (40.7)	1,080 (42.5)	—	—	—
	U		—	—	—	—	—	—	—	—
L7		mm (in.)	437 (17.2)	392 (15.4)	400 (15.7)	400 (15.7)	—	457 (18.0)	457 (18.0)	403 (15.9)
L8		mm (in.)	280 (11.0)	154 (6.1)	164 (6.5)	164 (6.5)	164 (6.5)	256 (10.1)	256 (10.1)	206 (8.1)
L9	S	mm (in.)	—	—	—	—	—	—	—	—
	L		—	—	—	14 (0.6)	—	—	—	—
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	—	—	—	—	—
	U		—	—	—	—	—	—	—	—
L10		mm (in.)	77 (3.0)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)
H1	S	mm (in.)	809 (31.9)	758 (29.8)	—	—	—	831 (32.7)	—	780 (30.7)
	L		931 (36.7)	—	879 (34.6)	879 (34.6)	901 (35.5)	954 (37.6)	954 (37.6)	—
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	1,006 (39.6)	1,028 (40.5)	—	—	—
	U		—	—	—	—	—	—	—	—
H2		mm (in.)	449 (17.7)	424 (16.7)	424 (16.7)	424 (16.7)	520 (20.5)	528 (20.8)	528 (20.8)	472 (18.6)
H3		mm (in.)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)
H4	S	mm (in.)	451 (17.8)	399 (15.7)	—	—	—	450 (17.7)	—	400 (15.7)
	L		572 (22.5)	—	520 (20.5)	520 (20.5)	520 (20.5)	538 (21.2)	538 (21.2)	—
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	647 (25.5)	647 (25.5)	—	—	—
	U		—	—	—	—	—	—	—	—
H5		mm (in.)	568 (22.4)	—	—	—	—	753 (29.6)	753 (29.6)	—
H6	S	mm (in.)	591 (23.3)	636 (25.0)	—	—	—	670 (26.4)	—	645 (25.4)
	L		652 (25.7)	—	689 (27.1)	689 (27.1)	698 (27.5)	722 (28.4)	722 (28.4)	—
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	760 (29.9)	764 (30.1)	—	—	—
	U		—	—	—	—	—	—	—	—
H7		mm (in.)	171 (6.7)	158 (6.2)	147 (5.8)	147 (5.8)	—	216 (8.5)	216 (8.5)	262 (10.3)
H8		mm (in.)	93 (3.7)	12 (0.5)	25 (1.0)	25 (1.0)	23 (0.9)	81 (3.2)	81 (3.2)	−24 (−0.94)
H9		mm (in.)	684 (26.9)	695 (27.4)	682 (26.9)	682 (26.9)	743 (29.3)	722 (28.4)	722 (28.4)	719 (28.3)
H10		mm (in.)	42 (1.7)	47 (1.9)	47 (1.9)	47 (1.9)	47 (1.9)	46 (1.8)	46 (1.8)	47 (1.9)
H11	S	mm (in.)	22 (0.9)	24 (0.9)	24 (0.9)	24 (0.9)	—	27 (1.1)	—	—
	L		21 (0.8)	—	—	—	—	27 (1.1)	27 (1.1)	—
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	—	—	—	—	—
	U		—	—	—	—	—	—	—	—
W1		mm (in.)	—	166 (6.5)	166 (6.5)	166 (6.5)	211 (8.3)	—	—	182 (7.2)
W2		mm (in.)	159 (6.3)	—	—	—	—	159 (6.3)	—	—
W3		mm (in.)	165 (6.5)	—	—	166 (6.5)	187 (7.4)	182 (7.2)	182 (7.2)	—
W4		mm (in.)	—	—	—	—	—	—	—	—
W5		mm (in.)	268 (10.6)	271 (10.7)	271 (10.7)	271 (10.7)	331 (13.0)	322 (12.7)	322 (12.7)	321 (12.6)
W6		mm (in.)	507 (20.0)	—	—	—	—	553 (21.8)	—	—
A1		degree	30	30	30	30	30	35	35	35
A2		degree	64	68	68	68	67	67	67	63
A3		degree	—	—	—	4	—	2.8	2.8	0
T1		mm (in.)	—	—	—	—	—	—	—	—

OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSIONS (2-STROKE)

Global model (US, CA model) Symbol		60FED 60FEDO L-transom	60FETO 70BETO S-transom	60FET 60FETO 70BETO L/X-transom	70BEHTO	55DEHD 75AEHD 85AEHD	75AED 85AED	75AET 85AET	E60JMHD E65AMHD E75BMHD
L1	mm (in.)	532 (20.9)	547 (21.5)	532 (20.9)	532 (20.9)	545 (21.5)	545 (21.5)	545 (21.5)	545 (21.5)
L2	mm (in.)	166 (6.5)	151 (5.9)	166 (6.5)	267 (10.5)	180 (7.1)	180 (7.1)	180 (7.1)	270 (10.6)
L3	mm (in.)	—	—	—	798 (31.4)	790 (31.1)	—	—	652 (25.7)
L4	mm (in.)	547 (21.5)	562 (22.1)	547 (21.5)	547 (21.5)	547 (21.5)	547 (21.5)	547 (21.5)	547 (21.5)
L5	S L Y X U	mm (in.)	— 113 (4.4)	— 91 (3.6)	— 91 (3.6)	— 88 (3.5)	— 88 (3.5)	— 88 (3.5)	— 81 (3.2)
			—	—	—	85 (3.3)	—	—	80 (3.1)
			—	80 (3.1)	80 (3.1)	85 (3.3)	80 (3.1)	80 (3.1)	70 (2.8)
			—	—	—	—	—	—	—
L6	S L Y X U	mm (in.)	— 968 (38.1)	868 (34.2) —	— 968 (38.1)	— 968 (38.1)	— 968 (38.1)	— 968 (38.1)	— 966 (38.0)
			—	—	—	1,015 (40.0)	—	—	1,011 (39.8)
			—	1,081 (42.6)	1,081 (42.6)	1,080 (42.5)	1,080 (42.5)	1,080 (42.5)	1,078 (42.4)
			—	—	—	—	—	—	—
L7	mm (in.)	411 (16.2)	403 (15.9)	411 (16.2)	411 (16.2)	459 (18.1)	459 (18.1)	459 (18.1)	542 (21.3)
L8	mm (in.)	214 (8.4)	206 (8.1)	214 (8.4)	271 (10.7)	164 (6.5)	164 (6.5)	164 (6.5)	256 (10.1)
L9	S L Y X U	mm (in.)	— 0.0 (0.00)	— 14 (0.6)	— 14 (0.6)	— —	— —	— 14 (0.6)	— —
			—	—	—	—	—	—	—
			—	31 (1.2)	31 (1.2)	—	—	23 (0.9)	—
			—	—	—	—	—	—	—
L10	mm (in.)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)	68 (2.7)
H1	S L Y X U	mm (in.)	— 901 (35.5)	780 (30.7) —	— 901 (35.5)	— 901 (35.5)	— 901 (35.5)	— 901 (35.5)	— 902 (35.5)
			—	—	—	952 (37.5)	—	—	953 (37.5)
			—	1,028 (40.5)	1,028 (40.5)	1,028 (40.5)	1,028 (40.5)	1,028 (40.5)	1,029 (40.5)
			—	—	—	—	—	—	—
H2	mm (in.)	472 (18.6)	472 (18.6)	472 (18.6)	472 (18.6)	520 (20.5)	520 (20.5)	520 (20.5)	590 (23.2)
H3	mm (in.)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)
H4	S L Y X U	mm (in.)	— 520 (20.5)	400 (15.7) —	— 520 (20.5)	— 520 (20.5)	— 520 (20.5)	— 520 (20.5)	— 521 (20.5)
			—	—	—	571 (22.5)	—	—	572 (22.5)
			—	—	648 (25.5)	648 (25.5)	647 (25.5)	647 (25.5)	648 (25.5)
			—	—	—	—	—	—	—
H5	mm (in.)	—	—	—	706 (27.8)	—	—	—	555 (21.9)
H6	S L Y X U	mm (in.)	— 696 (27.4)	645 (25.4) —	— 696 (27.4)	— 696 (27.4)	— 698 (27.5)	— 698 (27.5)	— 698 (27.5)
			—	—	—	729 (28.7)	—	—	725 (28.5)
			—	—	764 (30.1)	764 (30.1)	764 (30.1)	764 (30.1)	766 (30.2)
			—	—	—	—	—	—	—
H7	mm (in.)	249 (9.8)	262 (10.3)	249 (9.8)	249 (9.8)	199 (7.8)	199 (7.8)	199 (7.8)	253 (10.0)
H8	mm (in.)	−11 (−0.43)	−24 (−0.94)	−11 (−0.43)	70 (2.8)	23 (0.9)	23 (0.9)	23 (0.9)	84 (3.3)
H9	mm (in.)	706 (27.8)	719 (28.3)	706 (27.8)	731 (28.8)	743 (29.3)	743 (29.3)	743 (29.3)	778 (30.6)
H10	mm (in.)	47 (1.9)	47 (1.9)	47 (1.9)	47 (1.9)	47 (1.9)	47 (1.9)	47 (1.9)	46 (1.8)
H11	S L Y X U	mm (in.)	— 0.0 (0.00)	— 28 (1.1)	— 27 (1.1)	— —	— —	— 27 (1.1)	— —
			—	—	—	—	—	—	—
			—	27 (1.1)	27 (1.1)	—	—	27 (1.1)	—
			—	—	—	—	—	—	—
W1	mm (in.)	182 (7.2)	182 (7.2)	182 (7.2)	—	211 (8.3)	187 (7.4)	187 (7.4)	—
W2	mm (in.)	—	—	—	94 (3.7)	—	—	—	159 (6.3)
W3	mm (in.)	—	—	—	181 (7.1)	187 (7.4)	187 (7.4)	187 (7.4)	187 (7.4)
W4	mm (in.)	—	—	—	179 (7.0)	—	—	—	—
W5	mm (in.)	321 (12.6)	321 (12.6)	321 (12.6)	321 (12.6)	331 (13.0)	331 (13.0)	331 (13.0)	331 (13.0)
W6	mm (in.)	—	—	—	583 (23.0)	—	—	—	506 (19.9)
A1	degree	35	35	35	35	30	30	30	30
A2	degree	67	63	67	62	67	67	67	67
A3	degree	4	0	4	4	—	—	4	—
T1	mm (in.)	—	—	—	—	600 (23.6)	600 (23.6)	600 (23.6)	600 (23.6)

OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSIONS (2-STROKE)

Global model (US, CA model) Symbol		75CETO 90AETO (90TR)	E115AMH E115AWH	E115AE 115BE	E115AET 115BET 140BET	115CETO	130BETO	L/150AET L/200AET	150FETO L/200FETO 225DET
L1	mm (in.)	545 (21.5)	539 (21.2)	539 (21.2)	539 (21.2)	542 (21.3)	554 (21.8)	543 (21.4)	550 (21.7)
L2	mm (in.)	180 (7.1)	325 (12.8)	213 (8.4)	213 (8.4)	188 (7.4)	176 (6.9)	188 (7.4)	179 (17.0)
L3	mm (in.)	—	845 (33.3)	—	—	—	—	—	—
L4	mm (in.)	547 (21.5)	616 (24.3)	616 (24.3)	616 (24.3)	616 (24.3)	632 (24.9)	634 (25.0)	647 (25.5)
L5	S	mm (in.)	—	—	—	—	—	—	—
	L		88 (3.5)	80 (3.1)	80 (3.1)	80 (3.1)	70 (2.8)	70 (2.8)	49 (1.9)
	Y		—	75 (3.0)	—	—	—	—	—
	X		80 (3.1)	85 (3.3)	85 (3.3)	85 (3.3)	61 (2.4)	61 (2.4)	62 (2.4)
L6	S	mm (in.)	—	—	—	—	—	—	—
	L		968 (38.1)	1,005 (39.6)	1,005 (39.6)	1,005 (39.6)	1,007 (39.6)	1,007 (39.6)	1,030 (40.6)
	Y		—	1,055 (41.5)	—	—	—	—	—
	X		1,080 (42.5)	1,120 (44.1)	1,120 (44.1)	1,124 (44.3)	1,124 (44.3)	1,144 (45.0)	1,152 (45.4)
L7	mm (in.)	457 (18.0)	570 (22.4)	482 (19.0)	482 (19.0)	468 (18.4)	463 (18.2)	569 (22.4)	587 (23.1)
L8	mm (in.)	164 (6.5)	270 (10.6)	214 (8.4)	215 (8.5)	173 (6.8)	159 (6.3)	173 (6.8)	159 (6.3)
L9	S	mm (in.)	—	—	—	—	—	—	—
	L		14 (0.6)	—	—	12 (0.5)	44 (1.7)	31 (1.2)	54 (2.1)
	Y		—	—	—	—	—	—	—
	X		31 (1.2)	—	—	12 (0.5)	53 (2.1)	40 (1.6)	62 (2.4)
L10	mm (in.)	67 (2.6)	64 (2.5)	64 (2.5)	64 (2.5)	74 (2.9)	74 (2.9)	74 (2.9)	74 (2.9)
H1	S	mm (in.)	—	—	—	—	—	—	—
	L		901 (35.5)	929 (36.6)	929 (36.6)	929 (36.6)	928 (36.5)	928 (36.5)	946 (37.2)
	Y		—	982 (38.7)	—	—	—	—	—
	X		1,028 (40.5)	1,056 (41.6)	1,056 (41.6)	1,054 (41.5)	1,054 (41.5)	1,072 (42.2)	1,072 (42.2)
H2	mm (in.)	512 (20.2)	631 (24.8)	508 (20.0)	508 (20.0)	544 (21.4)	544 (21.4)	631 (24.8)	670 (26.4)
H3	mm (in.)	191 (7.5)	190 (7.5)	190 (7.5)	190 (7.5)	191 (7.5)	191 (7.5)	210 (8.3)	210 (8.3)
H4	S	mm (in.)	—	—	—	—	—	—	—
	L		520 (20.5)	515 (20.3)	515 (20.3)	515 (20.3)	515 (20.3)	515 (20.3)	516 (20.3)
	Y		—	568 (22.4)	—	—	—	—	—
	X		647 (25.5)	642 (25.3)	642 (25.3)	642 (25.3)	642 (25.3)	642 (25.3)	642 (25.3)
H5	mm (in.)	—	695 (27.4)	—	—	—	—	—	—
H6	S	mm (in.)	—	—	—	—	—	—	—
	L		698 (27.5)	735 (28.9)	735 (28.9)	735 (28.9)	764 (30.1)	764 (30.1)	762 (30.0)
	Y		—	765 (30.1)	—	—	—	—	—
	X		764 (30.1)	810 (31.9)	810 (31.9)	839 (33.0)	839 (33.0)	837 (33.0)	849 (33.4)
H7	mm (in.)	226 (8.9)	150 (5.9)	150 (5.9)	150 (5.9)	180 (7.1)	191 (7.5)	205 (8.1)	241 (9.5)
H8	mm (in.)	23 (0.9)	155 (6.1)	53 (2.1)	55 (2.2)	26 (1.0)	15 (0.6)	26 (1.0)	15 (0.6)
H9	mm (in.)	730 (28.7)	780 (30.7)	730 (28.7)	730 (28.7)	730 (28.7)	741 (29.2)	788 (31.0)	791 (31.1)
H10	mm (in.)	47 (1.9)	45 (1.8)	45 (1.8)	45 (1.8)	45 (1.8)	46 (1.8)	45.4 (1.8)	46 (1.8)
H11	S	mm (in.)	—	—	—	—	—	—	—
	L		27 (1.1)	—	—	—	—	—	—
	Y		—	—	—	30 (1.2)	30 (1.2)	31 (1.2)	33 (1.3)
	X		27 (1.1)	—	—	—	—	—	—
W1	mm (in.)	187 (7.4)	300 (11.8)	297 (11.7)	300 (11.8)	291 (11.5)	291 (11.5)	301 (11.9)	290 (11.4)
W2	mm (in.)	—	210 (8.3)	—	—	—	—	—	—
W3	mm (in.)	187 (7.4)	300 (11.8)	297 (11.7)	300 (11.8)	291 (11.5)	291 (11.5)	—	290 (11.4)
W4	mm (in.)	—	300 (11.8)	—	—	—	—	—	—
W5	mm (in.)	331 (13.0)	424 (16.7)	422 (16.6)	424 (16.7)	409 (16.1)	409 (16.1)	426 (16.8)	406 (16.0)
W6	mm (in.)	—	705 (27.8)	—	—	—	—	—	—
A1	degree	30	35	35	35	35	35	35	35
A2	degree	67	66	66	70	70	70	70	70
A3	degree	4	—	—	4	4	4	4	4
T1	mm (in.)	600 (23.6)	660 (26.0)	660 (26.0)	660 (26.0)	660 (26.0)	660 (26.0)	660 (26.0)	660 (26.0)

OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSIONS (2-STROKE)

Global model (US, CA model) Symbol		200GETO	Z150PETO Z175GETO (Z175TR) Z/LZ200NETO (Z/LZ200TR)	Z150QETO (VZ150TR) Z175HETO (VZ175TR) Z200PETO	L/250GETO
L1	mm (in.)	557 (21.9)	613 (24.1)	613 (24.1)	566 (22.3)
L2	mm (in.)	179 (7.0)	180 (7.1)	180 (7.1)	181 (7.1)
L3	mm (in.)	—	—	—	—
L4	mm (in.)	647 (25.5)	646 (25.4)	646 (25.4)	673 (26.5)
L5	S	—	—	—	—
	L	61 (2.4)	53 (2.1)	53 (2.1)	—
	Y	—	—	—	—
	X	—	69 (2.7)	—	69 (2.7)
	U	—	—	—	89 (3.5)
L6	S	—	—	—	—
	L	1,036 (40.8)	1,034 (40.7)	1,034 (40.7)	—
	Y	—	—	—	—
	X	—	1,150 (45.3)	—	1,155 (45.5)
	U	—	—	—	1,271 (50.0)
L7	mm (in.)	587 (23.1)	574 (22.6)	574 (22.6)	631 (24.8)
L8	mm (in.)	159 (6.3)	168 (6.6)	168 (6.6)	185 (7.3)
L9	S	—	—	—	—
	L	41 (1.6)	42 (1.7)	42 (1.7)	—
	Y	—	—	—	—
	X	—	50 (2.0)	—	52 (2.0)
	U	—	—	—	58 (2.3)
L10	mm (in.)	74 (2.9)	74 (2.9)	74 (2.9)	74 (2.9)
H1	S	—	—	—	—
	L	946 (37.2)	947 (37.3)	947 (37.3)	—
	Y	—	—	—	—
	X	—	1,074 (42.3)	—	1,077 (42.4)
	U	—	—	—	1,203 (47.4)
H2	mm (in.)	691 (27.2)	708 (27.9)	746 (27.9)	710 (28.0)
H3	mm (in.)	210 (8.3)	211 (8.3)	211 (8.3)	216 (8.5)
H4	S	—	—	—	—
	L	516 (20.3)	516 (20.3)	516 (20.3)	—
	Y	—	—	—	—
	X	—	643 (25.3)	—	642 (25.3)
	U	—	—	—	768 (30.2)
H5	mm (in.)	—	—	—	—
H6	S	—	—	—	—
	L	773 (30.4)	774 (30.5)	774 (30.5)	—
	Y	—	—	—	—
	X	—	850 (33.5)	—	846 (33.3)
	U	—	—	—	923 (36.3)
H7	mm (in.)	241 (9.5)	308 (12.1)	308 (12.1)	242 (9.5)
H8	mm (in.)	15 (0.6)	14 (0.6)	14 (0.6)	21 (0.8)
H9	mm (in.)	864 (34.0)	835 (32.9)	945 (37.2)	818 (32.2)
H10	mm (in.)	46 (1.8)	44 (1.7)	44 (1.7)	45 (1.8)
H11	S	—	—	—	—
	L	33 (1.3)	32 (1.3)	32 (1.3)	—
	Y	—	—	—	—
	X	33 (1.3)	32 (1.3)	—	25 (1.0)
	U	—	—	—	25 (1.0)
W1	mm (in.)	290 (11.4)	277 (10.9)	277 (10.9)	281 (11.1)
W2	mm (in.)	—	—	—	—
W3	mm (in.)	290 (11.4)	—	—	—
W4	mm (in.)	—	—	—	—
W5	mm (in.)	406 (16.0)	396 (15.6)	396 (15.6)	420 (16.5)
W6	mm (in.)	—	—	—	—
A1	degree	35	32	32	32
A2	degree	70	70	70	70
A3	degree	4	4	4	3
T1	mm (in.)	—	660 (26.0)	—	660 (26.0)

OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSIONS (4-STROKE)

Global model (US, CA model)		Symbol	F2AMH F2.5AMH (F2.5MH)	F4BMH (F4MHA) F5AMH F6CMH (F6MHA)	F8CMH (F8MHA) Long handle	F8CMH F8CWH Short handle	FT8DMH (T8MHA) FT8DWH (T8EHA) Long handle	FT8DE (T8EA)	FT8DEHP (T8PHA)	FT8DEP (T8PA)
L1		mm (in.)	315 (12.4)	409 (16.1)	430 (16.9)	430 (16.9)	430 (16.9)	430 (16.9)	430 (16.9)	430 (16.9)
L2		mm (in.)	93 (3.7)	130 (5.1)	122 (4.8)	122 (4.8)	122 (4.8)	122 (4.8)	122 (4.8)	122 (4.8)
L3		mm (in.)	309 (12.2)	341 (13.4)	608 (23.9)	498 (19.6)	608 (23.9)	—	608 (23.9)	—
L4		mm (in.)	215 (8.5)	259 (10.2)	355 (14.0)	355 (14.0)	367 (14.4)	367 (14.4)	367 (14.4)	367 (14.4)
L5	S	mm (in.)	57 (2.2)	71 (2.8)	72 (2.8)	72 (2.8)	—	—	—	—
	L		57 (2.2)	93 (3.7)	99 (3.9)	99 (3.9)	99 (3.9)	99 (3.9)	99 (3.9)	99 (3.9)
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	—	99 (3.9)	99 (3.9)	99 (3.9)	99 (3.9)
	U		—	—	—	—	—	—	—	—
L6	S	mm (in.)	636 (25.0)	635 (25.0)	706 (27.8)	706 (27.8)	—	—	—	—
	L		761 (30.0)	753 (29.6)	822 (32.4)	822 (32.4)	879 (34.6)	879 (34.6)	879 (34.6)	879 (34.6)
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	—	941 (37.0)	941 (37.0)	941 (37.0)	941 (37.0)
	U		—	—	—	—	—	—	—	—
L7		mm (in.)	366 (14.4)	383 (15.1)	271 (10.7)	271 (10.7)	271 (10.7)	271 (10.7)	271 (10.7)	271 (10.7)
L8		mm (in.)	167 (6.6)	134 (5.3)	139 (5.5)	139 (5.5)	139 (5.5)	139 (5.5)	190 (7.5)	225 (8.9)
L9	S	mm (in.)	—	—	—	—	—	—	—	—
	L		—	—	—	—	—	—	—	—
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	—	—	—	—	—
	U		—	—	—	—	—	—	—	—
L10		mm (in.)	75 (3.0)	63 (2.5)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)
H1	S	mm (in.)	645 (25.4)	644 (25.4)	682 (26.9)	682 (26.9)	—	—	—	—
	L		772 (30.4)	771 (30.4)	809 (31.9)	809 (31.9)	869 (34.2)	869 (34.2)	869 (34.2)	869 (34.2)
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	—	937 (36.9)	937 (36.9)	937 (36.9)	937 (36.9)
	U		—	—	—	—	—	—	—	—
H2		mm (in.)	376 (14.8)	395 (15.6)	318 (12.5)	318 (12.5)	318 (12.5)	318 (12.5)	318 (12.5)	318 (12.5)
H3		mm (in.)	103 (4.1)	104 (4.1)	123 (4.8)	123 (4.8)	157 (6.2)	157 (6.2)	157 (6.2)	157 (6.2)
H4	S	mm (in.)	432 (17.0)	435 (17.1)	436 (17.2)	436 (17.2)	—	—	—	—
	L		559 (22.0)	562 (22.1)	563 (22.2)	563 (22.2)	557 (21.9)	557 (21.9)	557 (21.9)	557 (21.9)
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	—	625 (24.6)	625 (24.6)	625 (24.6)	625 (24.6)
	U		—	—	—	—	—	—	—	—
H5		mm (in.)	470 (18.5)	430 (16.9)	673 (26.5)	563 (22.2)	673 (26.5)	—	673 (26.5)	—
H6	S	mm (in.)	642 (25.3)	555 (21.9)	594 (23.4)	594 (23.4)	—	—	—	—
	L		746 (29.4)	637 (25.1)	669 (26.3)	669 (26.3)	717 (28.2)	717 (28.2)	717 (28.2)	717 (28.2)
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	—	757 (29.8)	757 (29.8)	757 (29.8)	757 (29.8)
	U		—	—	—	—	—	—	—	—
H7		mm (in.)	264 (10.4)	191 (7.5)	203 (8.0)	203 (8.0)	203 (8.0)	203 (8.0)	203 (8.0)	203 (8.0)
H8		mm (in.)	15 (0.6)	1 (0.0)	5 (0.2)	5 (0.2)	5 (0.2)	5 (0.2)	5 (0.2)	5 (0.2)
H9		mm (in.)	406 (16.0)	503 (19.8)	529 (20.8)	529 (20.8)	529 (20.8)	529 (20.8)	529 (20.8)	529 (20.8)
H10		mm (in.)	32 (1.3)	39 (1.5)	32 (1.3)	32 (1.3)	32 (1.3)	32 (1.3)	32 (1.3)	32 (1.3)
H11	S	mm (in.)	—	—	—	—	—	—	—	—
	L		—	—	—	—	—	—	—	—
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	—	—	—	—	—
	U		—	—	—	—	—	—	—	—
W1		mm (in.)	140 (5.5)	181 (7.1)	159 (6.3)	169 (6.7)	172 (6.8)	177 (7.0)	172 (6.8)	177 (7.0)
W2		mm (in.)	205 (8.1)	222 (8.7)	199 (7.8)	206 (8.1)	199 (7.8)	—	199 (7.8)	135 (5.3)
W3		mm (in.)	139 (5.5)	—	159 (6.3)	159 (6.3)	159 (6.3)	159 (6.3)	159 (6.3)	159 (6.3)
W4		mm (in.)	135 (5.3)	153 (6.0)	159 (6.3)	159 (6.3)	159 (6.3)	159 (6.3)	159 (6.3)	159 (6.3)
W5		mm (in.)	—	325 (12.8)	286 (11.3)	286 (11.3)	286 (11.3)	286 (11.3)	326 (12.8)	271 (10.7)
W6		mm (in.)	—	425 (16.7)	619 (24.4)	536 (21.1)	619 (24.4)	—	586 (23.1)	271 (10.7)
A1		degree	360	90	45	45	45	45	40	40
A2		degree	80	69	66	66	66	66	66	66
A3		degree	—	—	—	—	—	—	—	—
T1		mm (in.)	—	—	—	—	—	—	—	—

OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSIONS (4-STROKE)

Global model (US, CA model)		Symbol	F9.9FMH F9.9FEH F9.9FWH Short handle	F9.9FMH (F9.9MHA) F9.9FEH (F9.9EHA) F9.9FWH Long handle	F9.9FE (F9.9EA)	FT9.9GMH (T9.9MHA) FT9.9GWH (T9.9EHA)	FT9.9GEHP (T9.9PHA)	FT9.9GE (T9.9EA)	FT9.9GEP (T9.9PA)	F9.9HMH F15CMH (F15MHA) F15CEH (F15EHA) F15CWH F20BMH (F20MHA) F20BEH (F20EHA) F20BWH F20CMH
L1	mm (in.)		431 (17.0)	431 (17.0)	431 (17.0)	431 (17.0)	430 (16.9)	431 (17.0)	430 (16.9)	489 (19.3)
L2	mm (in.)		121 (4.8)	121 (4.8)	121 (4.8)	121 (4.8)	122 (4.8)	121 (4.8)	122 (4.8)	219 (8.6)
L3	mm (in.)		497 (19.6)	607 (23.9)	—	607 (23.9)	608 (23.9)	—	—	559 (22.0)
L4	mm (in.)		356 (14.0)	356 (14.0)	356 (14.0)	367 (14.4)	367 (14.4)	367 (14.4)	367 (14.4)	387 (15.2)
L5	S L Y X U	mm (in.)	49 (1.9) 67 (2.6) — — —	49 (1.9) 67 (2.6) — — —	49 (1.9) 67 (2.6) — — —	— 67 (2.6) — 67 (2.6) —	— 35 (1.4) — 35 (1.4) —	— 67 (2.6) — 67 (2.6) —	— 35 (1.4) — 35 (1.4) —	64 (2.5) 82 (3.2) — — —
L6	S L Y X U	mm (in.)	708 (27.9) 825 (32.5) — — —	708 (27.9) 825 (32.5) — — —	708 (27.9) 825 (32.5) — — —	— 891 (35.1) — 954 (37.6) —	— 879 (34.6) — 941 (37.0) —	— 891 (35.1) — 954 (37.6) —	— 879 (34.6) — 941 (37.0) —	730 (28.7) 847 (33.3) — — —
L7	mm (in.)		274 (10.8)	274 (10.8)	274 (10.8)	274 (10.8)	271 (10.7)	274 (10.8)	271 (10.7)	381 (15.0)
L8	mm (in.)		138 (5.4)	138 (5.4)	138 (5.4)	138 (5.4)	139 (5.5)	138 (5.4)	139 (5.5)	237 (9.3)
L9	S L Y X U	mm (in.)	18 (0.7) 27 (1.1) — — —	18 (0.7) 27 (1.1) — — —	18 (0.7) 27 (1.1) — — —	— 27 (1.1) — 27 (1.1) —	— 62 (2.4) — 62 (2.4) —	— 27 (1.1) — 27 (1.1) —	— 62 (2.4) — 62 (2.4) —	9 (0.4) 18 (0.7) — — —
L10	mm (in.)		66 (2.6)	66 (2.6)	66 (2.6)	66 (2.6)	67 (2.6)	66 (2.6)	67 (2.6)	66 (2.6)
H1	S L Y X U	mm (in.)	677 (26.7) 804 (31.7) — — —	677 (26.7) 804 (31.7) — — —	677 (26.7) 804 (31.7) — — —	— 864 (34.0) — 932 (36.7) —	— 869 (34.2) — 937 (36.9) —	— 864 (34.0) — 932 (36.7) —	— 869 (34.2) — 937 (36.9) —	701 (27.6) 828 (32.6) — — —
H2	mm (in.)		323 (12.7)	323 (12.7)	323 (12.7)	323 (12.7)	318 (12.5)	323 (12.7)	318 (12.5)	377 (14.8)
H3	mm (in.)		123 (4.8)	123 (4.8)	123 (4.8)	157 (6.2)	157 (6.2)	157 (6.2)	157 (6.2)	133 (5.2)
H4	S L Y X U	mm (in.)	431 (17.0) 558 (22.0) — — —	431 (17.0) 558 (22.0) — — —	431 (17.0) 558 (22.0) — — —	— 552 (21.7) — 620 (24.4) —	— 557 (21.9) — 625 (24.6) —	— 552 (21.7) — 620 (24.4) —	— 557 (21.9) — 625 (24.6) —	438 (17.2) 565 (22.2) — — —
H5	mm (in.)		568 (22.4)	679 (26.7)	—	678 (26.7)	673 (26.5)	—	—	570 (22.4)
H6	S L Y X U	mm (in.)	604 (23.8) 682 (26.9) — — —	604 (23.8) 682 (26.9) — — —	604 (23.8) 682 (26.9) — — —	— 730 (28.7) — 771 (30.4) —	— 717 (28.2) — 757 (29.8) —	— 730 (28.7) — 771 (30.4) —	— 717 (28.2) — 757 (29.8) —	616 (24.3) 694 (27.3) — — —
H7	mm (in.)		206 (8.1)	206 (8.1)	206 (8.1)	206 (8.1)	203 (8.0)	206 (8.1)	203 (8.0)	399 (15.7)
H8	mm (in.)		8 (0.3)	8 (0.3)	8 (0.3)	8 (0.3)	5 (0.2)	8 (0.3)	5 (0.2)	44 (1.7)
H9	mm (in.)		533 (21.0)	609 (24.0)	533 (21.0)	609 (24.0)	604 (23.8)	533 (21.0)	529 (20.8)	580 (22.8)
H10	mm (in.)		37 (1.5)	37 (1.5)	37 (1.5)	37 (1.5)	32 (1.3)	37 (1.5)	32 (1.3)	37 (1.5)
H11	S L Y X U	mm (in.)	19 (0.7) 19 (0.7) — — —	19 (0.7) 19 (0.7) — — —	19 (0.7) 19 (0.7) — — —	— 19 (0.7) — 19 (0.7) —	— 33 (1.3) — 33 (1.3) —	— 19 (0.7) — 19 (0.7) —	— 33 (1.3) — 33 (1.3) —	19 (0.7) 19 (0.7) — — —
W1	mm (in.)		169 (6.7)	159 (6.3)	177 (7.0)	172 (6.8)	172 (6.8)	177 (7.0)	177 (7.0)	210 (8.3)
W2	mm (in.)		206 (8.1)	199 (7.8)	—	199 (7.8)	199 (7.8)	—	—	210 (8.3)
W3	mm (in.)		159 (6.3)	159 (6.3)	159 (6.3)	159 (6.3)	159 (6.3)	159 (6.3)	159 (6.3)	176 (6.9)
W4	mm (in.)		159 (6.3)	159 (6.3)	159 (6.3)	159 (6.3)	159	159 (6.3)	159 (6.3)	—
W5	mm (in.)		279 (11.0)	279 (11.0)	279 (11.0)	279 (11.0)	264 (10.4)	279 (11.0)	264 (10.4)	341 (13.4)
W6	mm (in.)		524 (20.6)	603 (23.7)	—	603 (23.7)	567 (22.3)	—	—	598 (23.5)
A1	degree		43	43	43	43	38	43	38	45
A2	degree		71	71	71	71	74	71	74	71
A3	degree		4	4	4	4	8	4	8	4
T1	mm (in.)		—	—	—	—	—	—	—	—

OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSIONS (4-STROKE)

Global model (US, CA model)		Symbol	F15CEHP (F15PHA) F20BEHP (F20PHA)	F15CE F20BE (F20EA)	F15CEP F20BEP (F20PA)	F25DMH (F25MHA) F25DEH (F25EHA) F25DWH	F25DMHD F25DEHD F25DWH	F25DEHT	F25DEH 6X4 tiller handle	F25DE (F25EA)
L1		mm (in.)	488 (19.2)	489 (19.3)	488 (19.2)	601 (23.7)	601 (23.7)	601 (23.7)	601 (23.7)	601 (23.7)
L2		mm (in.)	220 (8.7)	176 (6.9)	176 (6.9)	—	—	—	255 (10.0)	123 (4.8)
L3		mm (in.)	559 (22.0)	—	—	580 (22.8)	580 (22.8)	580 (22.8)	769 (30.3)	—
L4		mm (in.)	386 (15.2)	387 (15.2)	386 (15.2)	433 (17.0)	433 (17.0)	433 (17.0)	433 (17.0)	433 (17.0)
L5	S	mm (in.)	—	64 (2.5)	89 (3.5)	85 (3.3)	—	—	—	—
	L		82 (3.2)	82 (3.2)	82 (3.2)	103 (4.1)	111 (4.4)	111 (4.4)	103 (4.1)	103 (4.1)
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	115 (4.5)	124 (4.9)	124 (4.9)	—	—
	U		—	—	—	—	—	—	—	—
L6	S	mm (in.)	—	730 (28.7)	727 (28.6)	761 (30.0)	—	—	—	—
	L		840 (33.1)	847 (33.3)	840 (33.1)	880 (34.6)	875 (34.4)	875 (34.4)	880 (34.6)	880 (34.6)
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	960 (37.8)	951 (37.4)	951 (37.4)	—	—
	U		—	—	—	—	—	—	—	—
L7		mm (in.)	356 (14.0)	321 (12.6)	309 (12.2)	378 (14.9)	353 (13.9)	353 (13.9)	378 (14.9)	378 (14.9)
L8		mm (in.)	176 (6.9)	184 (7.2)	188 (7.4)	189 (7.4)	197 (7.8)	197 (7.8)	159 (6.3)	147 (5.8)
L9	S	mm (in.)	—	9 (0.4)	—	15 (0.6)	—	—	—	—
	L		18 (0.7)	18 (0.7)	18 (0.7)	6 (0.2)	14 (0.6)	14 (0.6)	6 (0.2)	6 (0.2)
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	1 (0.0)	10 (0.4)	10 (0.4)	—	—
	U		—	—	—	—	—	—	—	—
L10		mm (in.)	67 (2.6)	66 (2.6)	67 (2.6)	65 (2.6)	65 (2.6)	65 (2.6)	65 (2.6)	65 (2.6)
H1	S	mm (in.)	—	701 (27.6)	706 (27.8)	707 (27.8)	—	—	—	—
	L		833 (32.8)	828 (32.6)	833 (32.8)	834 (32.8)	834 (32.8)	834 (32.8)	834 (32.8)	834 (32.8)
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	920 (36.2)	920 (36.2)	920 (36.2)	—	—
	U		—	—	—	—	—	—	—	—
H2		mm (in.)	372 (14.6)	377 (14.8)	372 (14.6)	450 (17.7)	450 (17.7)	450 (17.7)	450 (17.7)	450 (17.7)
H3		mm (in.)	133 (5.2)	133 (5.2)	133 (5.2)	144 (5.7)	144 (5.7)	144 (5.7)	144 (5.7)	144 (5.7)
H4	S	mm (in.)	—	438 (17.2)	443 (17.4)	423 (16.7)	—	—	—	—
	L		570 (22.4)	565 (22.2)	570 (22.4)	550 (21.7)	550 (21.7)	550 (21.7)	550 (21.7)	550 (21.7)
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	635 (25.0)	636 (25.0)	636 (25.0)	—	—
	U		—	—	—	—	—	—	—	—
H5		mm (in.)	566 (22.3)	—	—	—	—	—	766 (30.2)	—
H6	S	mm (in.)	—	616 (24.3)	574 (22.6)	667 (26.3)	—	—	—	—
	L		643 (25.3)	694 (27.3)	643 (25.3)	748 (29.4)	665 (26.2)	665 (26.2)	748 (29.4)	748 (29.4)
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	803 (31.6)	711 (28.0)	711 (28.0)	—	—
	U		—	—	—	—	—	—	—	—
H7		mm (in.)	414 (16.3)	218 (8.6)	230 (9.1)	258 (10.2)	282 (11.1)	282 (11.1)	258 (10.2)	258 (10.2)
H8		mm (in.)	37 (1.5)	32 (1.3)	28 (1.1)	41 (1.6)	26 (1.0)	26 (1.0)	47 (1.9)	12 (0.5)
H9		mm (in.)	575 (22.6)	580 (22.8)	575 (22.6)	705 (27.8)	706 (27.8)	706 (27.8)	705 (27.8)	705 (27.8)
H10		mm (in.)	32 (1.3)	37 (1.5)	32 (1.3)	43 (1.7)	43 (1.7)	43 (1.7)	43 (1.7)	43 (1.7)
H11	S	mm (in.)	—	19 (0.7)	—	23 (0.9)	—	—	—	—
	L		19 (0.7)	19 (0.7)	19 (0.7)	22 (0.9)	18 (0.7)	18 (0.7)	22 (0.9)	22 (0.9)
	Y		—	—	—	—	—	—	—	—
	X		—	—	—	22 (0.9)	17 (0.7)	17 (0.7)	—	—
	U		—	—	—	—	—	—	—	—
W1		mm (in.)	210 (8.3)	210 (8.3)	210 (8.3)	199 (7.8)	199 (7.8)	199 (7.8)	199 (7.8)	199 (7.8)
W2		mm (in.)	210 (8.3)	—	—	213 (8.4)	213 (8.4)	213 (8.4)	128 (5.0)	—
W3		mm (in.)	176 (6.9)	180 (7.1)	180 (7.1)	—	—	—	—	—
W4		mm (in.)	—	—	—	—	—	—	—	—
W5		mm (in.)	320 (12.6)	341 (13.4)	320 (12.6)	387 (15.2)	387 (15.2)	387 (15.2)	387 (15.2)	387 (15.2)
W6		mm (in.)	568 (22.4)	—	—	604 (23.8)	604 (23.8)	604 (23.8)	665 (26.2)	—
A1		degree	40	45	40	42	42	42	42	42
A2		degree	67	71	S:63 / L:67	73	66	66	73	73
A3		degree	4	4	S:0 / L:4	4	3	3	4	4
T1		mm (in.)	—	—	—	—	—	—	—	—

OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSIONS (4-STROKE)

Global model (US, CA model)		FT25FET (T25A)	F30BEHT F40FEHT	F30BEHD (F30EHA) F40FEHD (F40EHA)	F30BET (F30A) F40FET (F40A)	F40FED (F40EA)	F40DET F50FET (F50TR/A) F60CET (F60TR/A)	F50FED	F50DET
Symbol									
L1	mm (in.)	601 (23.7)	583 (23.0)	583 (23.0)	583 (23.0)	583 (23.0)	584 (23.0)	584 (23.0)	576 (22.7)
L2	mm (in.)	134 (5.3)	235 (9.3)	235 (9.3)	134 (5.3)	134 (5.3)	122 (4.8)	122 (4.8)	142 (5.6)
L3	mm (in.)	—	779 (30.7)	779 (30.7)	—	—	—	—	—
L4	mm (in.)	522 (20.6)	522 (20.6)	522 (20.6)	522 (20.6)	522 (20.6)	533 (21.0)	533 (21.0)	532 (20.9)
L5	S	mm (in.)	—	—	77 (3.0)	77 (3.0)	—	—	—
	L		66 (2.6)	66 (2.6)	66 (2.6)	66 (2.6)	97 (3.8)	97 (3.8)	97 (3.8)
	Y		—	—	—	—	—	—	—
	X		66 (2.6)	—	66 (2.6)	—	121 (4.8)	—	—
L6	U		—	—	—	—	—	—	—
	S	mm (in.)	—	—	816 (32.1)	817 (32.2)	—	—	—
	L		924 (36.4)	925 (36.4)	923 (36.3)	924 (36.4)	932 (36.7)	930 (36.6)	933 (36.7)
	Y		—	—	—	—	—	—	—
L7	X		1,025 (40.4)	—	1,024 (40.3)	1,025 (40.4)	1,036 (40.8)	—	—
	U		—	—	—	—	—	—	—
	S	mm (in.)	338 (13.3)	345 (13.6)	342 (13.5)	345 (13.6)	342 (13.5)	417 (16.4)	406 (16.0)
	L		158 (6.2)	177 (7.0)	178 (7.0)	158 (6.2)	158 (6.2)	147 (5.8)	148 (5.8)
L8	mm (in.)	—	—	—	0 (0.0)	0 (0.0)	—	—	—
L9	S		29 (1.1)	29 (1.1)	29 (1.1)	29 (1.1)	0 (0.0)	0 (0.0)	0.6 (0.02)
	L		—	—	—	—	—	—	—
	Y		—	—	—	—	—	—	—
	X		29 (1.1)	—	29 (1.1)	—	0 (0.0)	—	—
L10	U		—	—	—	—	—	—	—
	S	mm (in.)	65 (2.6)	65 (2.6)	65 (2.6)	65 (2.6)	62 (2.4)	62 (2.4)	63 (2.5)
	L		—	—	757 (29.8)	757 (29.8)	—	—	—
	Y		879 (34.6)	879 (34.6)	879 (34.6)	879 (34.6)	870 (34.2)	870 (34.2)	876 (34.5)
H1	X		—	—	—	—	—	—	—
	U		993 (39.1)	—	993 (39.1)	993 (39.1)	984 (38.7)	—	—
	S		—	—	—	—	—	—	—
	L		—	—	—	—	—	—	—
H2	mm (in.)	433 (17.0)	471 (18.5)	471 (18.5)	471 (18.5)	471 (18.5)	545 (21.5)	545 (21.5)	519 (20.4)
H3	mm (in.)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)
H4	S	mm (in.)	—	—	414 (16.3)	414 (16.3)	414 (16.3)	—	—
	L		536 (21.1)	536 (21.1)	536 (21.1)	536 (21.1)	536 (21.1)	527 (20.7)	527 (20.7)
	Y		—	—	—	—	—	—	—
	X		650 (25.6)	—	650 (25.6)	650 (25.6)	641 (25.2)	—	—
H5	U		—	—	—	—	—	—	—
	S	mm (in.)	—	770 (30.3)	770 (30.3)	—	—	—	—
	L		—	—	594 (23.4)	606 (23.9)	594 (23.4)	—	—
	Y		667 (26.3)	667 (26.3)	660 (26.0)	667 (26.3)	660 (26.0)	708 (27.9)	682 (26.9)
H6	X		—	—	—	—	—	—	—
	U		728 (28.7)	—	720 (28.3)	728 (28.7)	774 (30.5)	—	—
	S		—	—	—	—	—	—	—
	L		—	—	—	—	—	—	—
H7	mm (in.)	274 (10.8)	306 (12.0)	304 (12.0)	306 (12.0)	304 (12.0)	354 (13.9)	354 (13.9)	327 (12.9)
H8	mm (in.)	14 (0.6)	44 (1.7)	43 (1.7)	14 (0.6)	15 (0.6)	22 (0.9)	25 (1.0)	3.5 (0.14)
H9	mm (in.)	698 (27.5)	695 (27.4)	695 (27.4)	695 (27.4)	695 (27.4)	759 (29.9)	762 (30.0)	733 (28.9)
H10	mm (in.)	43 (1.7)	43 (1.7)	43 (1.7)	43 (1.7)	43 (1.7)	49 (1.9)	49 (1.9)	44 (1.7)
H11	S	mm (in.)	—	—	—	19 (0.7)	19 (0.7)	—	—
	L		19 (0.7)	19 (0.7)	19 (0.7)	19 (0.7)	19 (0.7)	24 (0.9)	24 (0.9)
	Y		—	—	—	—	—	—	—
	X		19 (0.7)	—	19 (0.7)	19 (0.7)	24 (0.9)	—	—
T1	U		—	—	—	—	—	—	—
	S	mm (in.)	199 (7.8)	192 (7.6)	192 (7.6)	192 (7.6)	192 (7.6)	192 (7.6)	181 (7.1)
	L		—	128 (5.0)	128 (5.0)	—	—	—	—
	Y		—	—	—	—	—	—	181 (7.1)
W3	mm (in.)	—	—	—	—	—	—	—	—
W4	mm (in.)	—	—	—	—	—	—	—	—
W5	mm (in.)	376 (14.8)	364 (14.3)	364 (14.3)	364 (14.3)	364 (14.3)	360 (14.2)	360 (14.2)	345 (13.6)
W6	mm (in.)	—	654 (25.7)	654 (25.7)	—	—	—	—	—
A1	degree	40	40	40	40	40	40	40	40
A2	degree	66	66	65	66	65	63	63	65
A3	degree	3	3	3	3	3	4	4	4
T1	mm (in.)	—	—	—	—	—	560 (22.0)	560 (22.0)	560 (22.0)

OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSIONS (4-STROKE)

Global model (US, CA model)		Symbol		F50FEHD	F50FEHT (F50THA) F60CEHT (F60THA)	FT50GET (T50TR/A) FT60DET (T60TR/A)	FT50CET	FT50GEHT FT60DEHT	FT50CEHD	FT50CED	FT60DEHD
L1	mm (in.)			584 (23.0)	584 (23.0)	584 (23.0)	576 (22.7)	584 (23.0)	576 (22.7)	576 (22.7)	584 (23.0)
L2	mm (in.)			225 (8.9)	225 (8.9)	122 (4.8)	142 (5.6)	225 (8.9)	272 (10.7)	142 (5.6)	225 (8.9)
L3	mm (in.)			788 (31.0)	788 (31.0)	—	—	788 (31.0)	797 (31.2)	—	788 (31.0)
L4	mm (in.)			533 (21.0)	533 (21.0)	561 (22.1)	560 (22.1)	561 (22.1)	560 (22.1)	560 (22.1)	561 (22.1)
L5	S	mm (in.)		—	—	—	—	—	—	—	—
	L			97 (3.8)	97 (3.8)	98 (3.9)	98 (3.9)	98 (3.9)	98 (3.9)	98 (3.9)	98 (3.9)
	Y			—	—	—	—	—	—	—	—
	X			—	121 (4.8)	114 (4.5)	—	114 (4.5)	—	—	—
	U			—	—	—	—	—	—	—	—
L6	S	mm (in.)		—	—	—	—	—	—	—	—
	L			930 (36.6)	932 (36.7)	996 (39.2)	989 (38.9)	996 (39.2)	989 (38.9)	989 (38.9)	995 (39.2)
	Y			—	—	—	—	—	—	—	—
	X			—	1,036 (40.8)	1,099 (43.3)	—	1,099 (43.3)	—	—	—
	U			—	—	—	—	—	—	—	—
L7	mm (in.)			406	417 (16.4)	417 (16.4)	407 (16.0)	417 (16.4)	397 (15.6)	397 (15.6)	407 (16.0)
L8	mm (in.)			168 (6.6)	165 (6.5)	147 (5.8)	148 (5.8)	165 (6.5)	189 (7.2)	149 (5.9)	168 (6.6)
L9	S	mm (in.)		—	—	—	—	—	—	—	—
	L			0 (0.0)	0 (0.0)	0 (0.0)	0.8 (0.03)	0 (0.0)	0.8 (0.03)	0.8 (0.03)	0 (0.0)
	Y			—	—	—	—	—	—	—	—
	X			—	0 (0.0)	0 (0.0)	—	0 (0.0)	—	—	—
	U			—	—	—	—	—	—	—	—
L10	mm (in.)			62 (2.4)	62 (2.4)	62 (2.4)	63 (2.5)	62 (2.4)	63 (2.5)	63 (2.5)	62 (2.4)
H1	S	mm (in.)		—	—	—	—	—	—	—	—
	L			870 (34.2)	870 (34.2)	910 (35.8)	917 (36.1)	910 (35.8)	917 (36.1)	917 (36.1)	910 (35.8)
	Y			—	—	—	—	—	—	—	—
	X			—	984 (38.7)	1,024 (40.3)	—	1,024 (40.3)	—	—	—
	U			—	—	—	—	—	—	—	—
H2	mm (in.)			545 (21.5)	545 (21.5)	545 (21.5)	519 (20.4)	545 (21.5)	519 (20.4)	519 (20.4)	545 (21.5)
H3	mm (in.)			175 (6.9)	175 (6.9)	191 (7.5)	194 (7.6)	191 (7.5)	194 (7.6)	194 (7.6)	191 (7.5)
H4	S	mm (in.)		—	—	—	—	—	—	—	—
	L			527 (20.7)	527 (20.7)	530 (20.9)	533 (21.0)	530 (20.9)	533 (21.0)	533 (21.0)	530 (20.9)
	Y			—	—	—	—	—	—	—	—
	X			—	641 (25.2)	644 (25.3)	—	644 (25.3)	—	—	—
	U			—	—	—	—	—	—	—	—
H5	mm (in.)			790 (31.1)	790 (31.1)	—	—	790 (31.1)	680 (26.8)	—	790 (31.1)
H6	S	mm (in.)		—	—	—	—	—	—	—	—
	L			682 (26.9)	708 (27.9)	746 (29.4)	749 (29.5)	746 (29.4)	723 (28.5)	723 (28.5)	720 (28.3)
	Y			—	—	—	—	—	—	—	—
	X			—	774 (30.5)	812 (40.0)	—	812 (40.0)	—	—	—
	U			—	—	—	—	—	—	—	—
H7	mm (in.)			354 (13.9)	354 (13.9)	354 (13.9)	327 (12.9)	354 (13.9)	330 (13.0)	330 (13.0)	354 (13.9)
H8	mm (in.)			33 (1.3)	37 (1.5)	22 (0.9)	3.5 (0.14)	37 (1.5)	110 (4.3)	0.5 (0.02)	34 (1.3)
H9	mm (in.)			713 (28.1)	759 (29.9)	759 (29.9)	733 (28.9)	759 (29.9)	738 (29.1)	738 (29.1)	763 (30.0)
H10	mm (in.)			49 (1.9)	49 (1.9)	49 (1.9)	44 (1.7)	49 (1.9)	44 (1.7)	44 (1.7)	49 (1.9)
H11	S	mm (in.)		—	—	—	—	—	—	—	—
	L			24 (0.9)	24 (0.9)	24 (0.9)	28 (1.1)	24 (0.9)	28 (1.1)	28 (1.1)	24 (0.9)
	Y			—	—	—	—	—	—	—	—
	X			—	24 (0.9)	—	—	—	—	—	—
	U			—	—	—	—	—	—	—	—
W1	mm (in.)			192 (7.6)	192 (7.6)	192 (7.6)	181 (7.1)	192 (7.6)	181 (7.1)	181 (7.1)	192 (7.6)
W2	mm (in.)			137 (5.4)	137 (5.4)	—	—	137 (5.4)	213 (8.4)	—	137 (5.4)
W3	mm (in.)			—	—	—	181 (7.1)	—	181 (7.13)	181 (7.13)	—
W4	mm (in.)			—	—	—	—	—	—	—	—
W5	mm (in.)			360 (14.2)	360 (14.2)	360 (14.2)	345 (13.6)	360 (14.2)	345 (13.6)	345 (13.6)	360 (14.2)
W6	mm (in.)			672 (26.5)	672 (26.5)	—	—	672 (26.5)	738 (29.1)	—	672 (26.5)
A1	degree			40	40	40	40	40	40	40	40
A2	degree			63	65	65	65	65	63	63	67
A3	degree			4	4	4	4	4	4	4	4
T1	mm (in.)			—	—	560 (22.0)	560 (22.0)	—	560 (22.0)	560 (22.0)	—

OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSIONS (4-STROKE)

Global model (US, CA model)		Symbol	F70AET (F70A) F40GET	F70AET (F70A) w/ 6X4 tiller handle	F75BET (F75TR/A) F80BET F90BET (F90TR/A) F100DET	F75BET (F75TR/A) F80BET F90BET (F90TR/A) F100DET w/ 6X4 tiller handle	F75CED F80CED	F75CEHD F80CEHD F100BEHD	F95AET F100BET	F/FL115AET (F/LF115A)
L1		mm (in.)	591 (23.3)	591 (23.3)	651 (25.6)	651 (25.6)	664 (26.1)	664 (26.1)	664 (26.1)	665 (26.2)
L2		mm (in.)	122 (4.8)	225 (8.9)	171 (6.7)	247 (9.7)	161 (6.3)	324 (12.8)	161 (6.3)	161 (6.3)
L3		mm (in.)	—	788 (31.0)	—	822 (32.4)	—	844 (33.2)	—	—
L4		mm (in.)	582 (22.9)	582 (22.9)	574 (22.6)	574 (22.6)	631 (24.8)	631 (24.8)	631 (24.8)	631 (24.8)
L5	S	mm (in.)	—	—	—	—	—	—	—	—
	L		67 (2.6)	67 (2.6)	63 (2.5)	63 (2.5)	79 (3.1)	79 (3.1)	69 (2.7)	69 (2.7)
	Y		—	—	—	—	—	—	—	—
	X		67 (2.6)	67 (2.6)	63 (2.5)	63 (2.5)	87 (3.4)	87 (3.4)	76 (3.0)	89 (3.5)
	U		—	—	—	—	—	—	—	—
L6	S	mm (in.)	—	—	—	—	—	—	—	—
	L		1,000 (39.4)	1,000 (39.4)	998 (39.3)	998 (39.3)	1,005 (39.6)	1,005 (39.6)	1,005 (39.6)	1,005 (39.6)
	Y		—	—	—	—	—	—	—	—
	X		1,103 (43.4)	1,103 (43.4)	1,115 (43.9)	1,115 (43.9)	1,118 (44.0)	1,118 (44.0)	1,122 (44.2)	1,122 (44.2)
	U		—	—	—	—	—	—	—	—
L7		mm (in.)	421 (16.6)	421 (16.6)	527 (20.7)	527 (20.7)	504 (19.8)	504 (19.8)	536 (21.9)	555 (21.9)
L8		mm (in.)	152 (6.0)	165 (6.5)	164 (6.5)	108 (4.3)	168 (6.6)	208 (8.2)	158 (6.2)	158 (6.2)
L9	S	mm (in.)	—	—	—	—	—	—	—	—
	L		26 (1.0)	26 (1.0)	28 (1.1)	28 (1.1)	19 (0.7)	19 (0.7)	25 (1.0)	25 (1.0)
	Y		—	—	—	—	—	—	—	—
	X		26 (1.0)	26 (1.0)	28 (1.1)	28 (1.1)	15 (0.6)	15 (0.6)	25 (1.0)	33 (1.3)
	U		—	—	—	—	—	—	—	—
L10		mm (in.)	62 (2.4)	62 (2.4)	62 (2.4)	62 (2.4)	75 (3.0)	75 (3.0)	75 (3.0)	75 (3.0)
H1	S	mm (in.)	—	—	—	—	—	—	—	—
	L		915 (36.0)	915 (36.0)	917 (36.1)	917 (36.1)	929 (36.6)	929 (36.6)	929 (36.6)	929 (36.6)
	Y		—	—	—	—	—	—	—	—
	X		1,029 (40.5)	1,029 (40.5)	1,044 (41.1)	1,044 (41.1)	1,056 (41.6)	1,056 (41.6)	1,056 (41.6)	1,056 (41.6)
	U		—	—	—	—	—	—	—	—
H2		mm (in.)	561 (22.1)	561 (22.1)	666 (26.2)	666 (26.2)	667 (26.3)	667 (26.3)	666 (26.2)	681 (26.8)
H3		mm (in.)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)
H4	S	mm (in.)	—	—	—	—	—	—	—	—
	L		534 (21.0)	534 (21.0)	536 (21.1)	536 (21.1)	516 (20.3)	516 (20.3)	516 (20.3)	516 (20.3)
	Y		—	—	—	—	—	—	—	—
	X		648 (25.5)	648 (25.5)	663 (26.1)	663 (26.1)	643 (25.3)	643 (25.3)	643 (25.3)	643 (25.3)
	U		—	—	—	—	—	—	—	—
H5		mm (in.)	—	790 (31.1)	—	784 (30.9)	—	764 (30.1)	—	—
H6	S	mm (in.)	—	—	—	—	—	—	—	—
	L		749 (29.5)	749 (29.5)	766 (30.2)	766 (30.2)	709 (27.9)	709 (27.9)	776 (30.6)	773 (30.4)
	Y		—	—	—	—	—	—	—	—
	X		815 (32.1)	815 (32.1)	842 (33.1)	842 (33.1)	776 (30.6)	776 (30.6)	854 (33.6)	850 (33.5)
	U		—	—	—	—	—	—	—	—
H7		mm (in.)	371 (14.6)	371 (14.6)	366 (14.4)	366 (14.4)	401 (15.8)	401 (15.8)	388 (15.3)	406 (16.0)
H8		mm (in.)	26 (1.0)	37 (1.5)	27 (1.1)	49 (1.9)	4 (0.2)	93 (3.7)	14 (0.6)	14 (0.6)
H9		mm (in.)	741 (29.2)	741 (29.2)	857 (33.7)	857 (33.7)	892 (35.1)	892 (35.1)	877 (34.5)	879 (34.6)
H10		mm (in.)	49 (1.9)	49 (1.9)	49 (1.9)	49 (1.9)	44 (1.7)	44 (1.7)	44 (1.7)	44 (1.7)
H11	S	mm (in.)	—	—	—	—	—	—	—	—
	L		29 (1.1)	29 (1.1)	25 (1.0)	25 (1.0)	17 (0.7)	17 (0.7)	25 (1.0)	25 (1.0)
	Y		—	—	—	—	—	—	—	—
	X		29 (1.1)	29 (1.1)	24 (0.9)	24 (0.9)	17 (0.7)	17 (0.7)	25 (1.0)	25 (1.0)
	U		—	—	—	—	—	—	—	—
W1		mm (in.)	193 (7.6)	193 (7.6)	240 (9.4)	240 (9.4)	243 (9.6)	243 (9.6)	243 (9.6)	249 (9.8)
W2		mm (in.)	—	137 (5.4)	—	137 (5.4)	—	96 (3.8)	—	—
W3		mm (in.)	—	—	—	—	—	—	—	—
W4		mm (in.)	—	—	—	—	—	—	—	—
W5		mm (in.)	363 (14.3)	363 (14.3)	405 (15.9)	405 (15.9)	384 (15.1)	384 (15.1)	384 (15.1)	392 (15.4)
W6		mm (in.)	—	676 (26.6)	—	633 (24.9)	—	578 (22.8)	—	—
A1		degree	40	40 (1.6)	35	35	30	30	30	30
A2		degree	65	65 (2.6)	70	70	64	64	70	70
A3		degree	4	4 (0.2)	4	4	3	3	4	4
T1		mm (in.)	560 (22.0)	—	660 (26.0)	660 (26.0)	660 (26.0)	—	660 (26.0)	660 (26.0)

OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSIONS (4-STROKE)

Global model (US, CA model)		Symbol	F/FL150AET (F/LF150A) F/FL150BET	F/FL200CET (F/LF200A) F/FL225BET (F/LF225A) F/FL250AET (F/LF250TR) F/FL200BET F/FL250GET	F225CET L-transom	F200DET (VF200LA) F225DET (VF225LA) F250CET (VF250LA) F225GET F250FET F275AET L-transom	F/FL225FET (F/LF225CA) F/FL250DET (F/LF250CA) F/FL300BET (F/LF300CA)	F/FL300AET F/FL350AET (F/LF350CA)
L1	mm (in.)							
L2	mm (in.)		698 (27.5)	651 (25.6)	664 (26.1)	741 (29.2)	728 (28.7)	776 (30.6)
L3	mm (in.)		164 (6.5)	219 (8.6)	206 (8.1)	218 (8.6)	230 (9.1)	255 (10.0)
L4	mm (in.)		—	—	—	—	—	—
L5	mm (in.)		646 (25.4)	673 (26.5)	685 (27.0)	688 (27.1)	673 (26.5)	732 (28.8)
L5	S	mm (in.)	—	—	—	—	—	—
	L		60 (2.5)	—	62 (2.4)	54 (2.1)	—	—
	Y		—	—	—	—	—	—
	X		80 (3.2)	59 (2.3)	—	—	59 (2.3)	48 (1.9)
	U		—	59 (2.3)	—	—	59 (2.3)	48 (1.9)
L6	S	mm (in.)	—	—	—	—	—	—
	L		1,032 (40.6)	—	1,043 (41.1)	1,033 (40.7)	—	—
	Y		—	—	—	—	—	—
	X		1,148 (45.2)	1,115 (45.5)	—	—	1,155 (45.5)	1,193 (47.0)
	U		—	1,272 (50.1)	—	—	1,272 (50.1)	1,310 (51.6)
L7	mm (in.)		629 (24.8)	619 (24.4)	615 (24.2)	651 (25.6)	639 (25.2)	712 (28.0)
L8	mm (in.)		162 (6.4)	230 (9.1)	226 (8.9)	237 (9.3)	240 (9.4)	258 (10.2)
L9	S	mm (in.)	—	—	—	—	—	—
	L		35 (1.4)	—	18 (0.7)	81 (3.2)	—	—
	Y		—	—	—	—	—	—
	X		43 (1.8)	52 (2.0)	—	—	53 (2.1)	56 (2.2)
	U		—	59 (2.3)	—	—	59 (2.3)	62 (2.4)
L10	mm (in.)		75 (3.0)	75 (3.0)	75 (3.0)	75 (3.0)	75 (3.0)	73 (2.9)
H1	S	mm (in.)	—	—	—	—	—	—
	L		946 (37.2)	—	951 (37.4)	932 (36.7)	—	—
	Y		—	—	—	—	—	—
	X		1,073 (42.2)	1,078 (42.4)	—	—	1,078 (42.4)	1,098 (43.2)
	U		—	1,205 (47.4)	—	—	1,205 (47.4)	1,225 (48.2)
H2	mm (in.)		769 (31.3)	752 (29.6)	754 (29.7)	817 (32.2)	812 (32.0)	909 (35.8)
H3	mm (in.)		210 (8.3)	216 (8.5)	216 (8.5)	216 (8.5)	216 (8.5)	229 (9.0)
H4	S	mm (in.)	—	—	—	—	—	—
	L		516 (20.3)	—	516 (20.3)	493 (19.4)	—	—
	Y		—	—	—	—	—	—
	X		643 (25.3)	643 (25.3)	—	—	643 (25.3)	637 (25.1)
	U		—	770 (30.3)	—	—	770 (30.3)	764 (30.1)
H5	mm (in.)		—	—	—	—	—	—
H6	S	mm (in.)	—	—	—	—	—	—
	L		787 (31.0)	—	779 (30.7)	715 (28.1)	—	—
	Y		—	—	—	—	—	—
	X		864 (34.0)	847 (33.3)	—	—	847 (33.3)	864 (34.0)
	U		—	924 (36.4)	—	—	924 (36.4)	941 (37.0)
H7	mm (in.)		455 (18.0)	387 (15.2)	399 (15.7)	507 (20.0)	510 (20.1)	588 (23.1)
H8	mm (in.)		16 (0.6)	39 (1.5)	26 (1.0)	33 (1.3)	48 (1.9)	65 (2.6)
H9	mm (in.)		915 (36.2)	902 (35.5)	915 (36.0)	1,008 (39.7)	951 (37.4)	1,041 (41.0)
H10	mm (in.)		45 (1.8)	45 (1.8)	45 (1.8)	45 (1.8)	45 (1.8)	49 (1.9)
H11	S	mm (in.)	—	—	—	—	—	—
	L		27 (1.1)	—	26 (1.0)	35 (1.4)	—	—
	Y		—	—	—	—	—	—
	X		27 (1.1)	25 (1.0)	—	—	25 (1.0)	26 (1.0)
	U		—	25 (1.0)	—	—	25 (1.0)	26 (1.0)
W1	mm (in.)		256 (10.1)	317 (12.5)	318 (12.5)	332 (13.1)	317 (12.5)	317 (12.5)
W2	mm (in.)		—	—	—	—	—	—
W3	mm (in.)		—	—	—	—	—	—
W4	mm (in.)		—	—	—	—	—	—
W5	mm (in.)		433 (17.1)	453 (17.8)	464 (18.3)	496 (19.5)	454 (17.9)	476 (18.7)
W6	mm (in.)		—	—	—	—	—	—
A1	degree		35	32	35	35	32	32
A2	degree		70	70	67	66	67	70
A3	degree		4	3	4	4	3	3
T1	mm (in.)		660 (26)	724 (28.5)	—	—	724 (28.5)	724 (28.5)

OUTBOARD MOTOR DIMENSIONS


CLAMP BRACKET DIMENSION ITEMS

Symbol	Definition and Description
B1	Horizontal dimension from centerline of motor body to lower bracket mounting hole (slot)
B2	Vertical dimension from transom top to lower bracket mounting hole (slot)
B3	Horizontal dimension from centerline of motor body to the center of upper bracket mounting hole
B4	Vertical dimension from transom top to the center of upper bracket mounting hole
B5	Horizontal dimension from centerline of motor body to the point of largest width on the bracket
B6	Vertical dimension from transom top to lowest point on the bracket
B7	Horizontal dimension from centerline of motor body to the center of lower extra bracket mounting hole
B8	Vertical dimension from transom top to the center of extra hole at the lower part of bracket
B9	Dimensions between the upper bracket mounting bolts (when holes are at even intervals)
B10	Dimensions between the upper bracket mounting bolts (when holes are not at even intervals)
B11	Horizontal dimensions from centerline of motor body to the clamping bolt center
B12	Vertical dimensions from transom top to the clamping bolt center
B13	Mount flange thickness of clamp bracket
C1	Allowable transom board thickness when clamping screw is driven-in to the least extent
C2	Allowable transom board thickness when clamping screw is driven-in to the full extent
C3	Maximum allowable transom plate thickness for mounting the motor
D1	Diameter of bracket (main) lower mounting hole, or screw
D2	Diameter of bracket (main) mounting hole, or screw (lower mounting hole diameter, or, for slot, center-to-center distance of both end circles)
D3	Diameter of bracket mounting (sub) hole
D4	Diameter of central bracket mounting extra hole or the screw size
AN1	Vertical dimension from bottom of clamp bracket to the bottom end of anode
AN2	Horizontal dimension from centerline of motor (anode) to the point of largest width of anode

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	F2A	F2.5A						
US model		F2.5						
Canada model		F2.5						
Manual tilt								

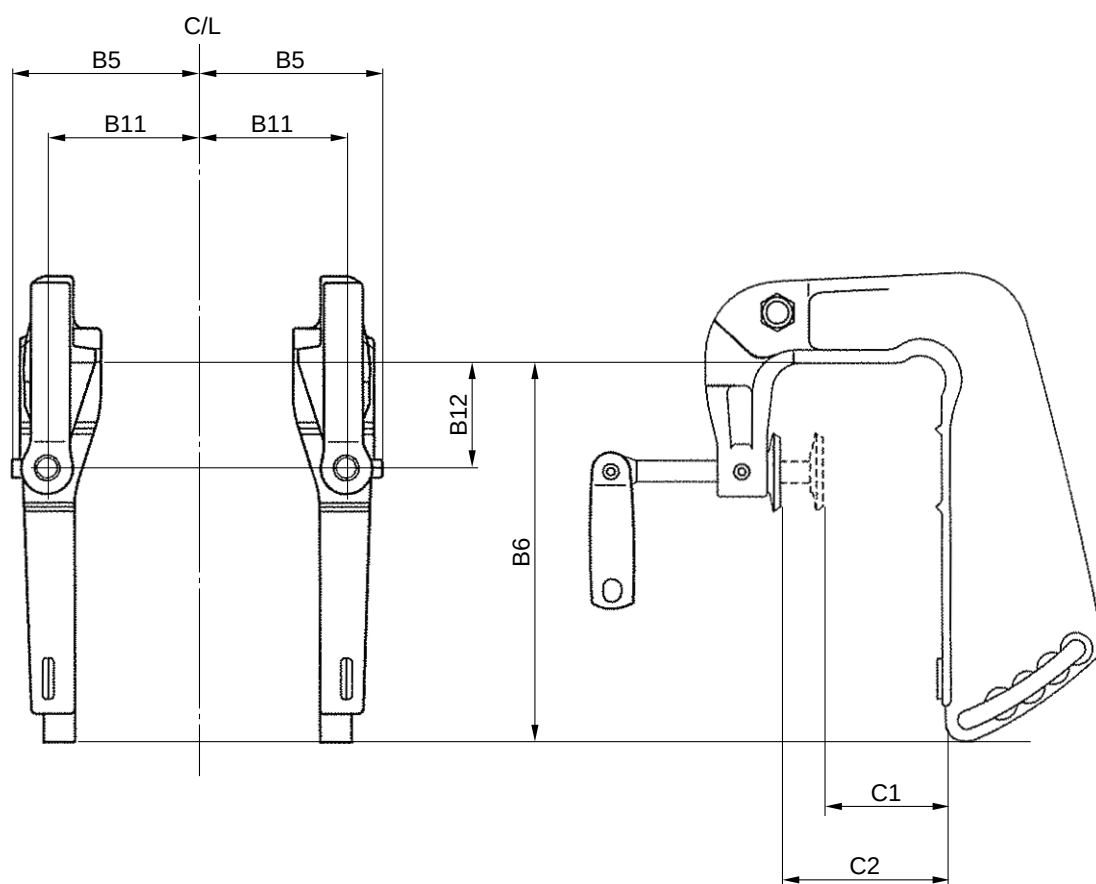


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	—	B8	—	C1	22 (0.9)	D1	—
B2	—	B9	—	C2	58 (2.3)	D2	—
B3	—	B10	—	C3	—	D3	—
B4	—	B11	56 (2.2)			D4	—
B5	69 (2.7)	B12	40 (0.2)				
B6	143.7 (5.7)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	4AC	5C	5CS	F4B	F5A	F6C		
US model				F4A		F6A		
Canada model				F4A		F6A		
Manual tilt								

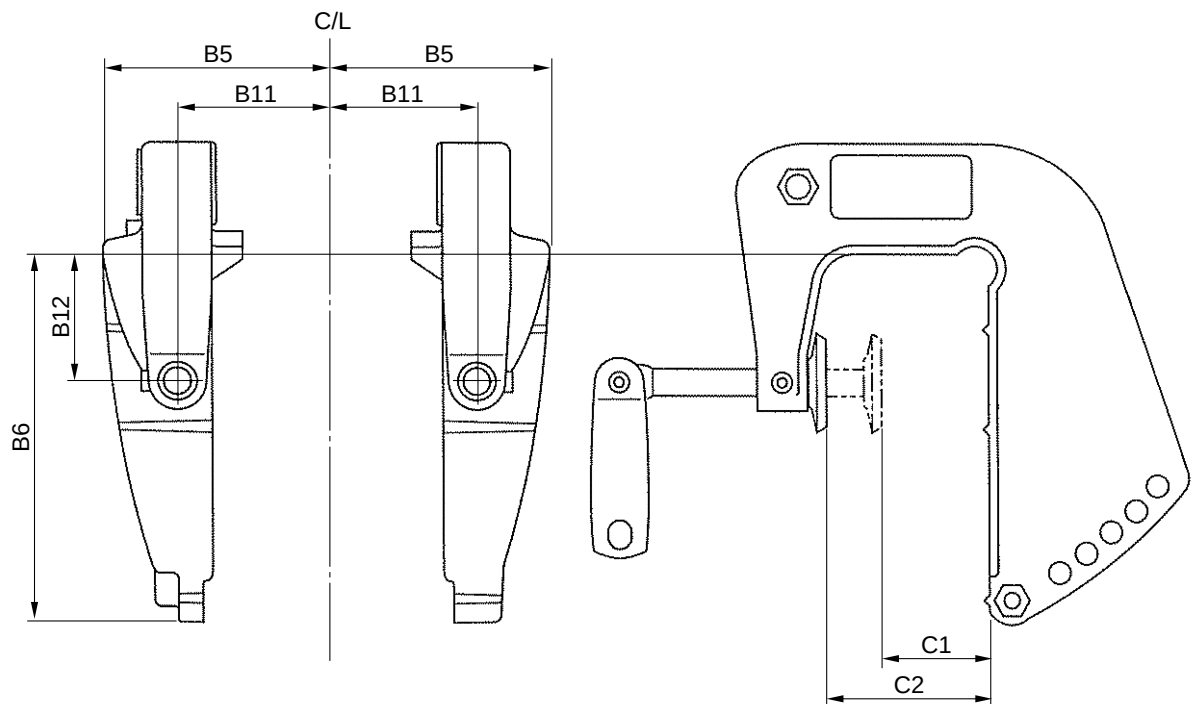


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	—	B8	—	C1	22 (0.9)	D1	—
B2	—	B9	—	C2	58 (2.3)	D2	—
B3	—	B10	—	C3	—	D3	—
B4	—	B11	55 (2.2)			D4	—
B5	83 (3.3)	B12	48 (1.9)				
B6	136 (5.4)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	6C	8C						
US model								
Canada model	6	8						
Manual tilt								

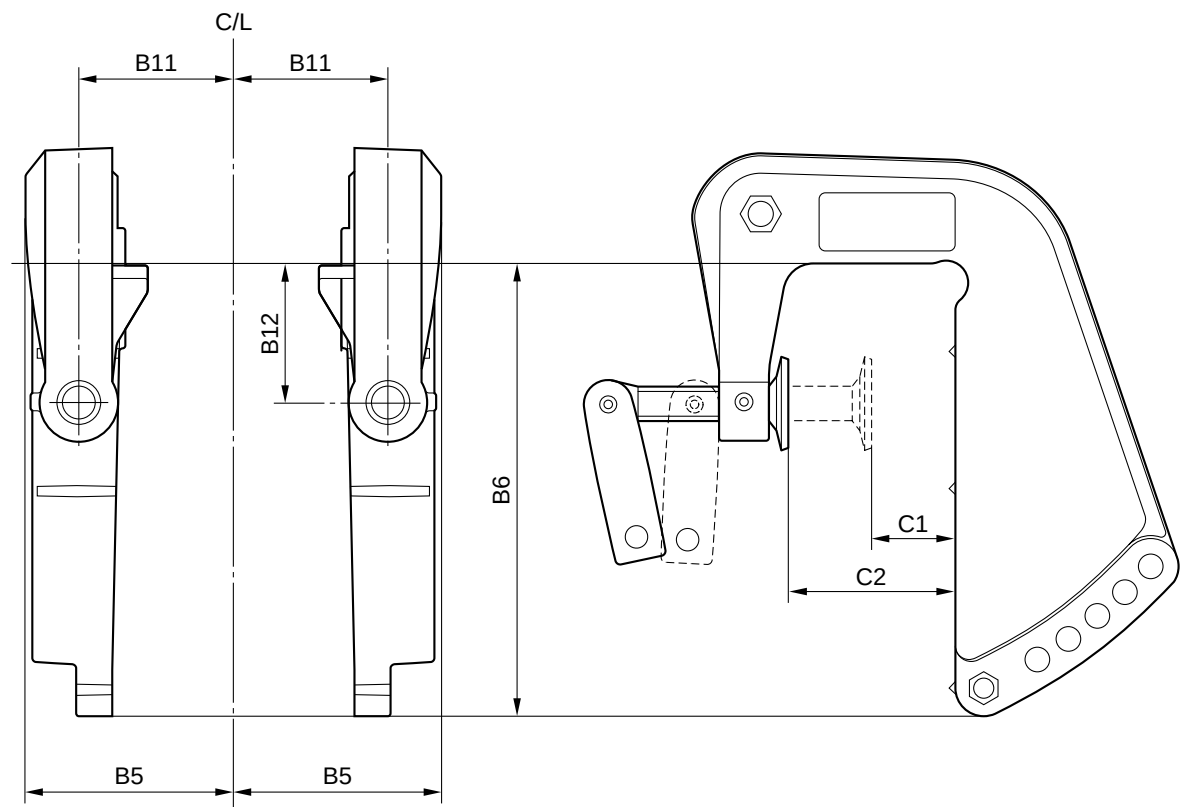


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	—	B8	—	C1	22 (0.9)	D1	—
B2	—	B9	—	C2	55 (2.2)	D2	—
B3	—	B10	—	C3	—	D3	—
B4	—	B11	56 (2.2)			D4	—
B5	75 (3.0)	B12	50 (2.0)				
B6	164.3 (6.5)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	F8C	FT8D						
US model	F8A							
Canada model	F8A	T8A						
Manual tilt								

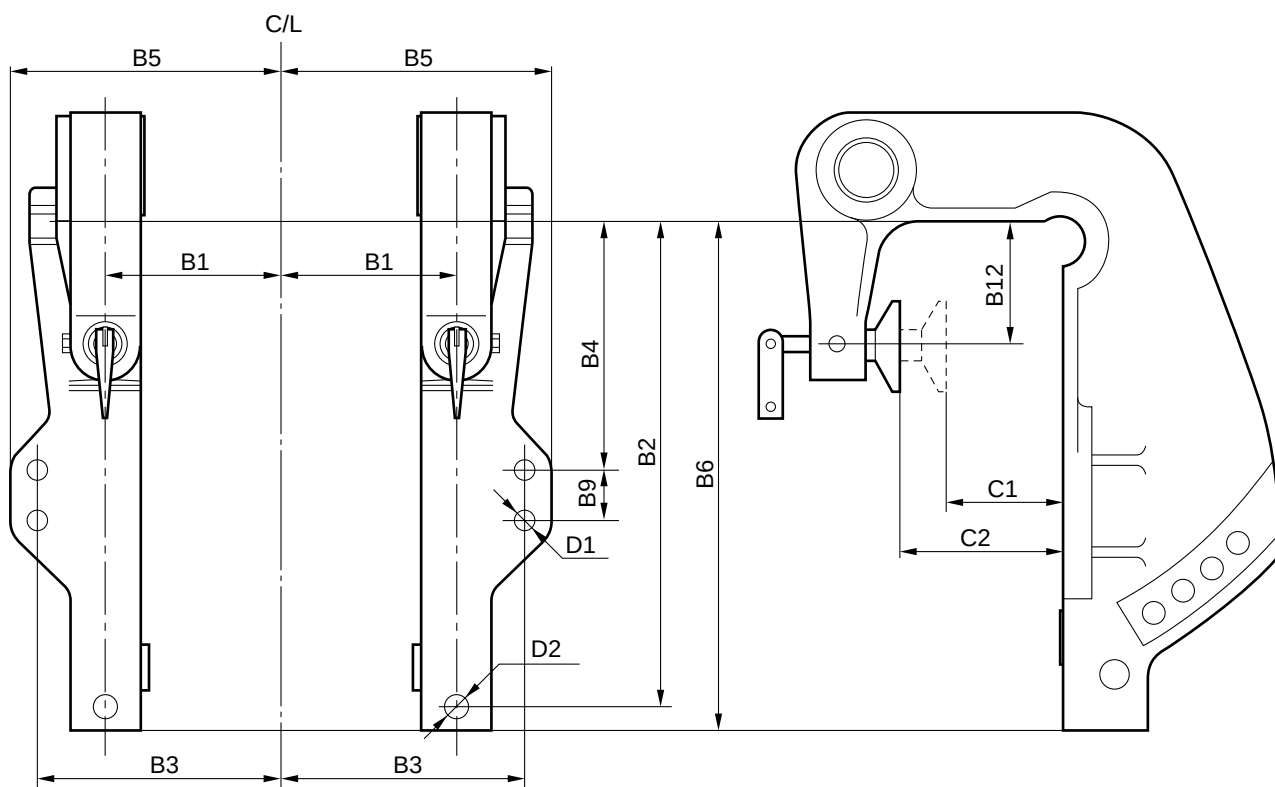


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	70.5 (2.8)	B8	—	C1	32 (1.3)	D1	8.3 (0.3)
B2	180.5 (7.1)	B9	18 (0.7)	C2	65 (2.6)	D2	8.3 (0.3)
B3	95.3 (3.8)	B10	—	C3	—	D3	—
B4	94.5 (3.7)	B11	—			D4	—
B5	105.3 (4.2)	B12	48 (1.9)				
B6	189.5 (7.4)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	9.9F	15F						
US model								
Canada model	9.9	15						
Manual tilt								

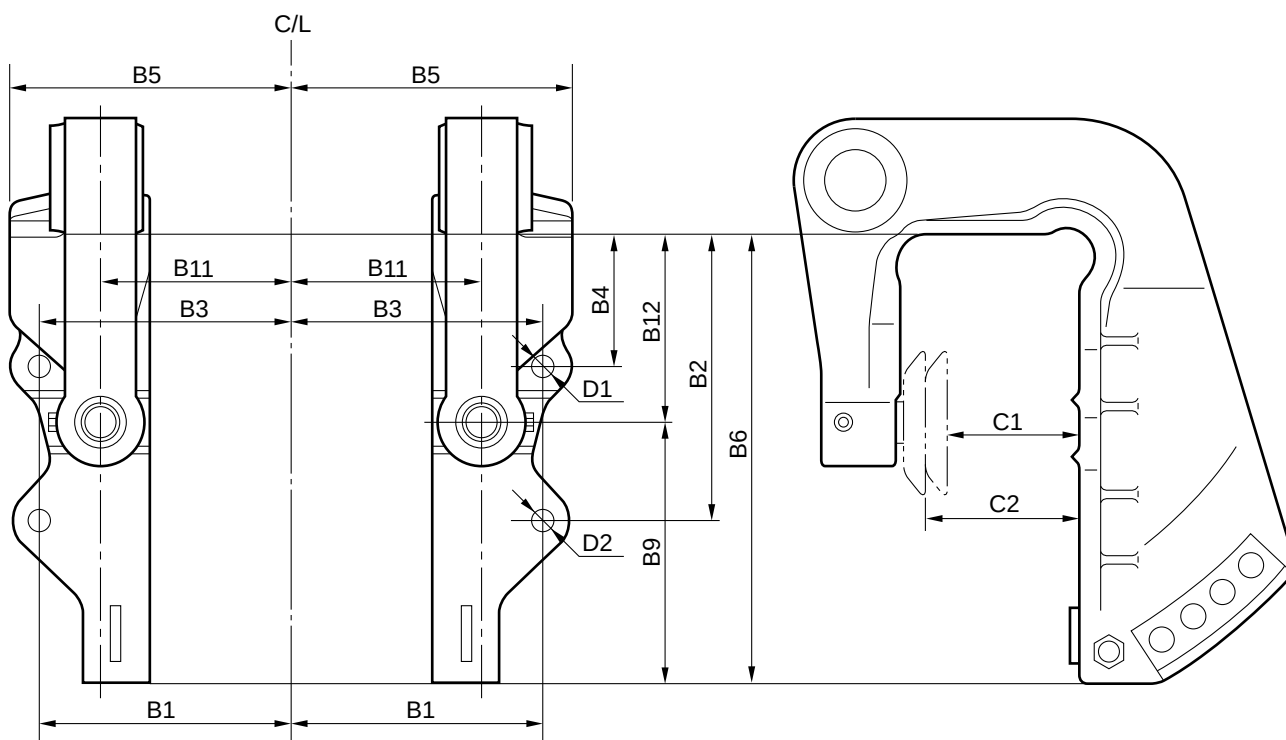


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	92.5 (3.6)	B8	—	C1	30 (1.2)	D1	8.3 (0.3)
B2	103.5 (4.1)	B9	54.5 (2.1)	C2	56 (2.2)	D2	8.3 (0.3)
B3	92.5 (3.6)	B10	—	C3	—	D3	—
B4	49 (1.9)	B11	70.5 (2.8)			D4	—
B5	102.5 (4.0)	B12	69 (2.7)				
B6	176 (6.9)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	E9.9D	E15D	EK9.9D	EK15D	EK9.9J	EK15P		
US model								
Canada model								
Manual tilt								

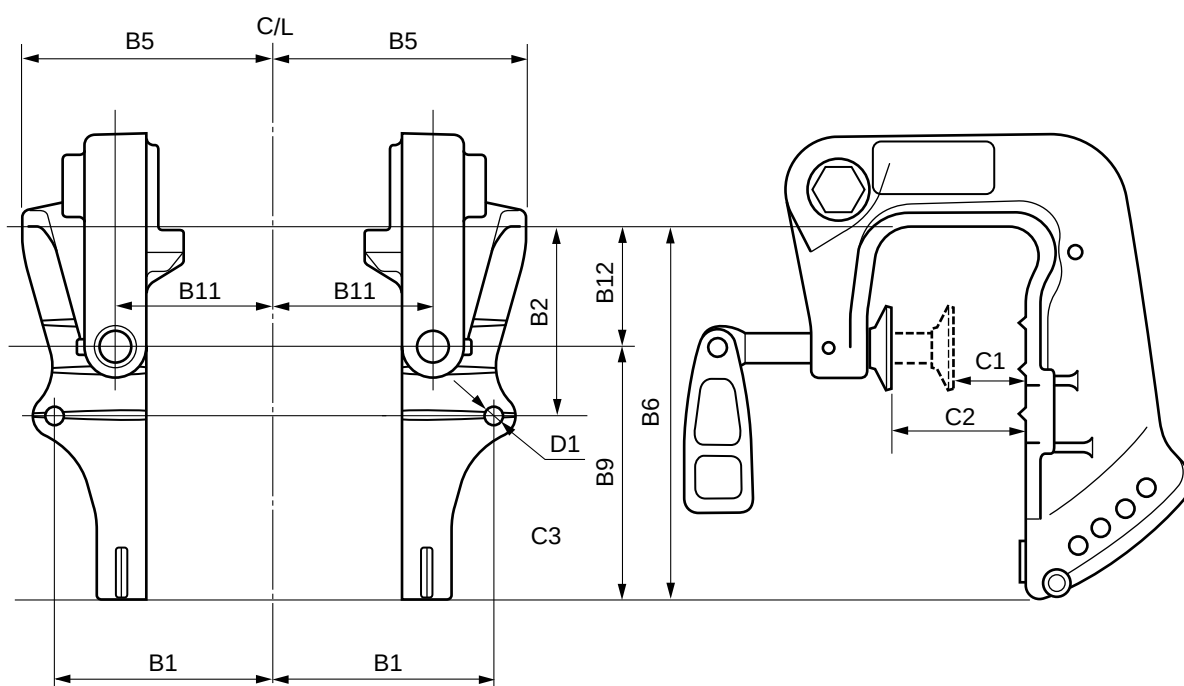


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	92.6 (3.6)	B8	—	C1	30 (1.2)	D1	8.3 (0.32)
B2	79 (3.1)	B9	107 (4.2)	C2	60 (2.4)	D2	—
B3	—	B10	—	C3	—	D3	—
B4	—	B11	67.3 (2.6)			D4	—
B5	106.3 (4.2)	B12	50 (2.0)				
B6	157 (6.2)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	F9.9H	F15C	F20B	F20C	F9.9F	FT9.9G		
US model		F15A	F20A		F9.9A			
Canada model		F15A	F20A		F9.9A	T9.9A		
Manual tilt								

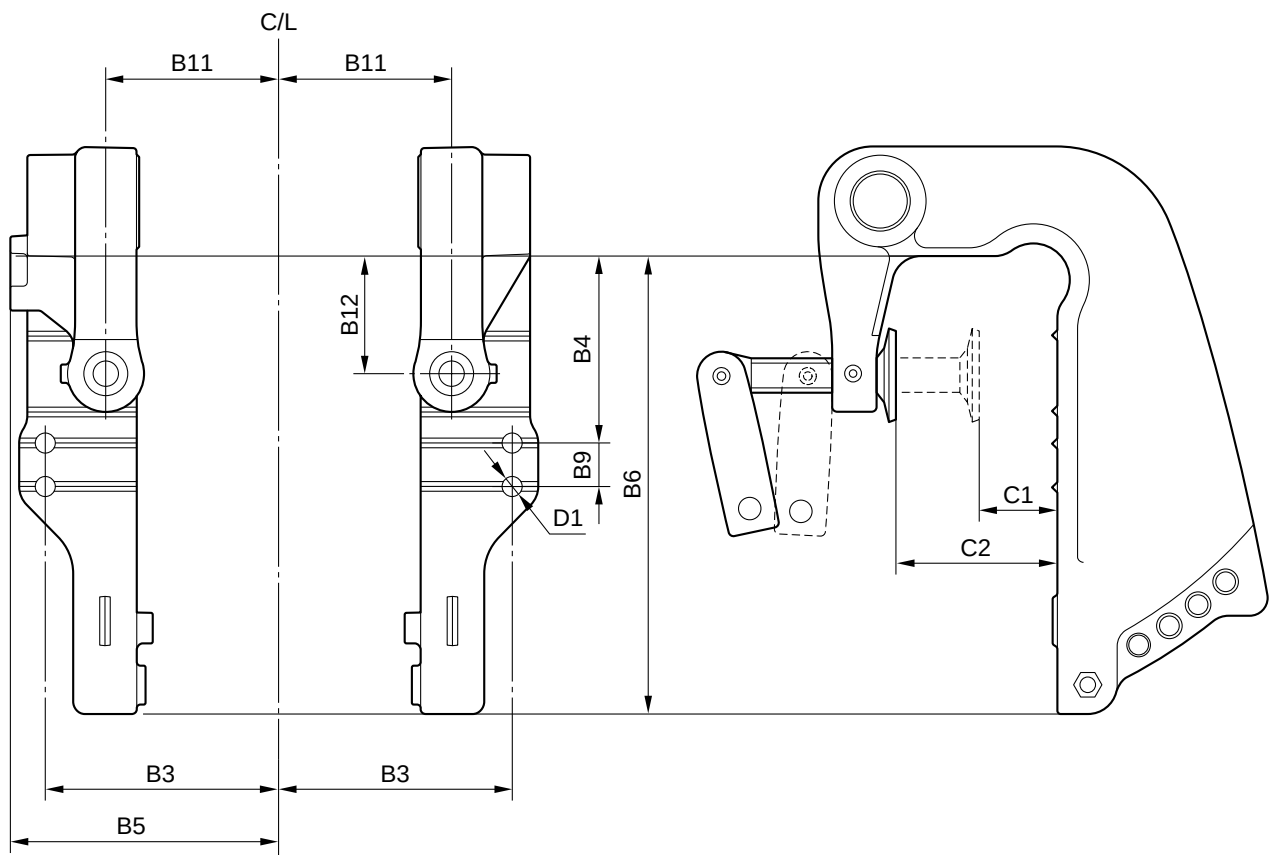


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	—	B8	—	C1	32 (1.3)	D1	8.3 (0.33)
B2	—	B9	18 (0.71)	C2	67 (2.6)	D2	—
B3	95.3 (3.8)	B10	—	C3	—	D3	—
B4	76.5 (3.0)	B11	70.5 (2.8)			D4	—
B5	110 (4.3)	B12	48 (1.9)				
B6	187.5 (7.4)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	FT8D	F15C	F20B	FT9.9G				
US model		F15A	F20A	T9.9A				
Canada model	T8A	F15A	F20A	T9.9A				
Power tilt								

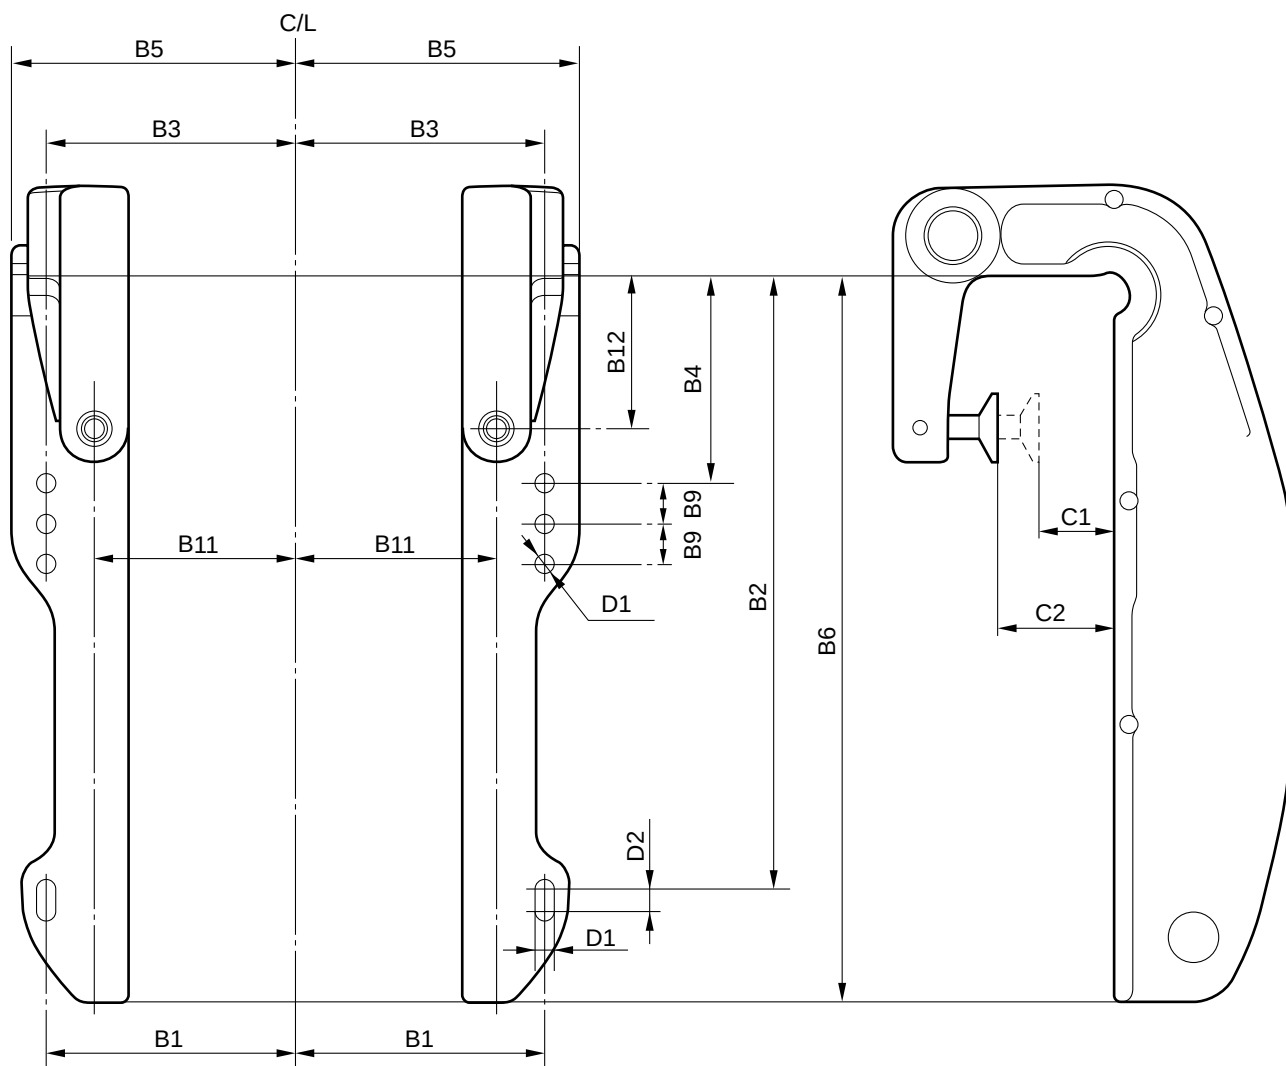


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	95.3 (3.8)	B8	—	C1	38 (1.5)	D1	8.3 (0.3)
B2	275.5 (10.8)	B9	18 (0.7)	C2	67 (2.6)	D2	10 (0.4)
B3	95.3 (3.8)	B10	—	C3	—	D3	—
B4	94.5 (3.7)	B11	73.5 (2.9)			D4	—
B5	111 (4.4)	B12	69.5 (2.7)				
B6	325.5 (12.8)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	E/25B	25X	E/30H	EK25B	EK25C			
US model								
Canada model								
Manual tilt								

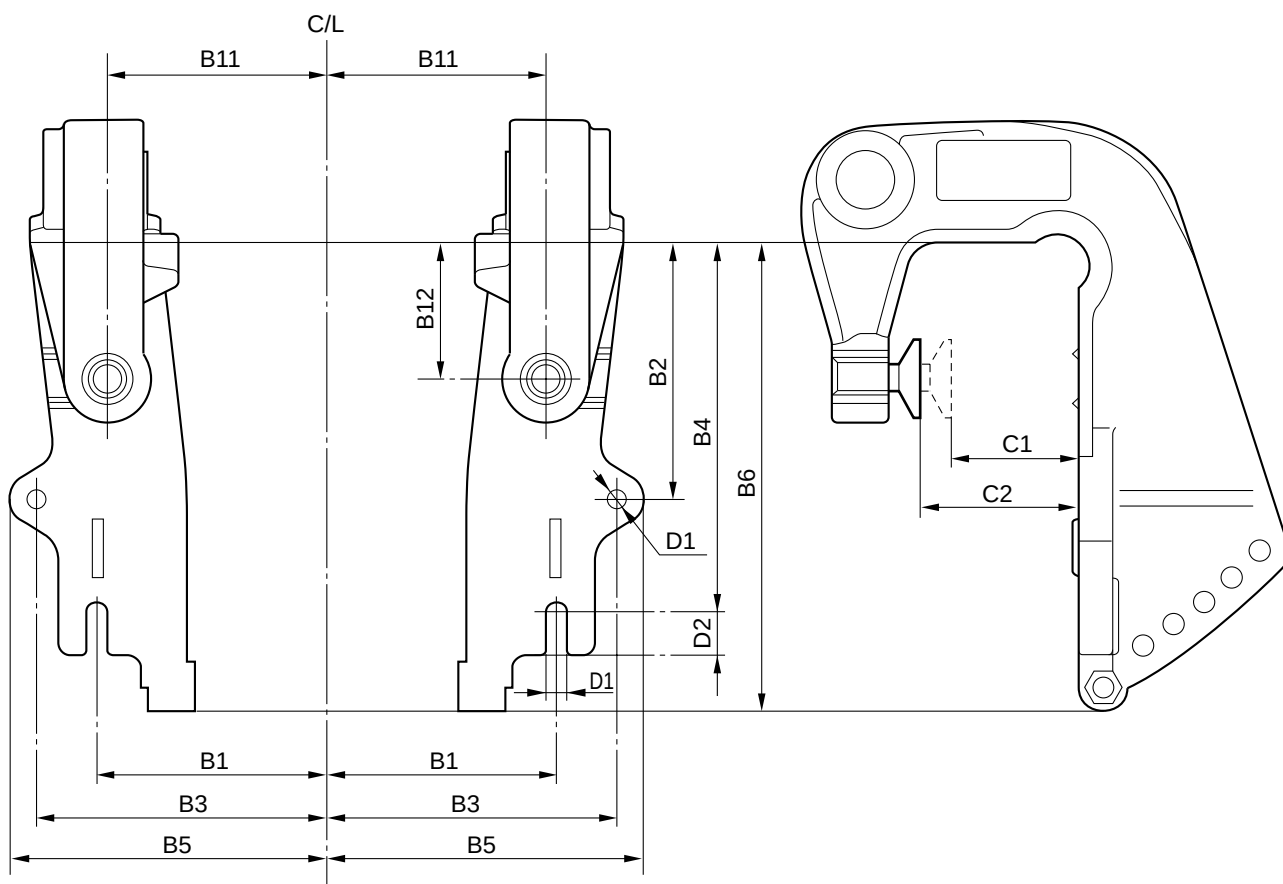


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	89 (3.5)	B8	—	C1	35 (1.4)	D1	8.5 (0.33)
B2	140 (5.5)	B9	—	C2	65 (2.6)	D2	15 (0.59)
B3	112.5 (4.4)	B10	—	C3	—	D3	—
B4	96.5 (3.8)	B11	85 (3.3)			D4	—
B5	122.5 (4.8)	B12	51 (2.0)				
B6	176 (6.9)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	20D	25N						
US model								
Canada model	20	25						
Manual tilt								

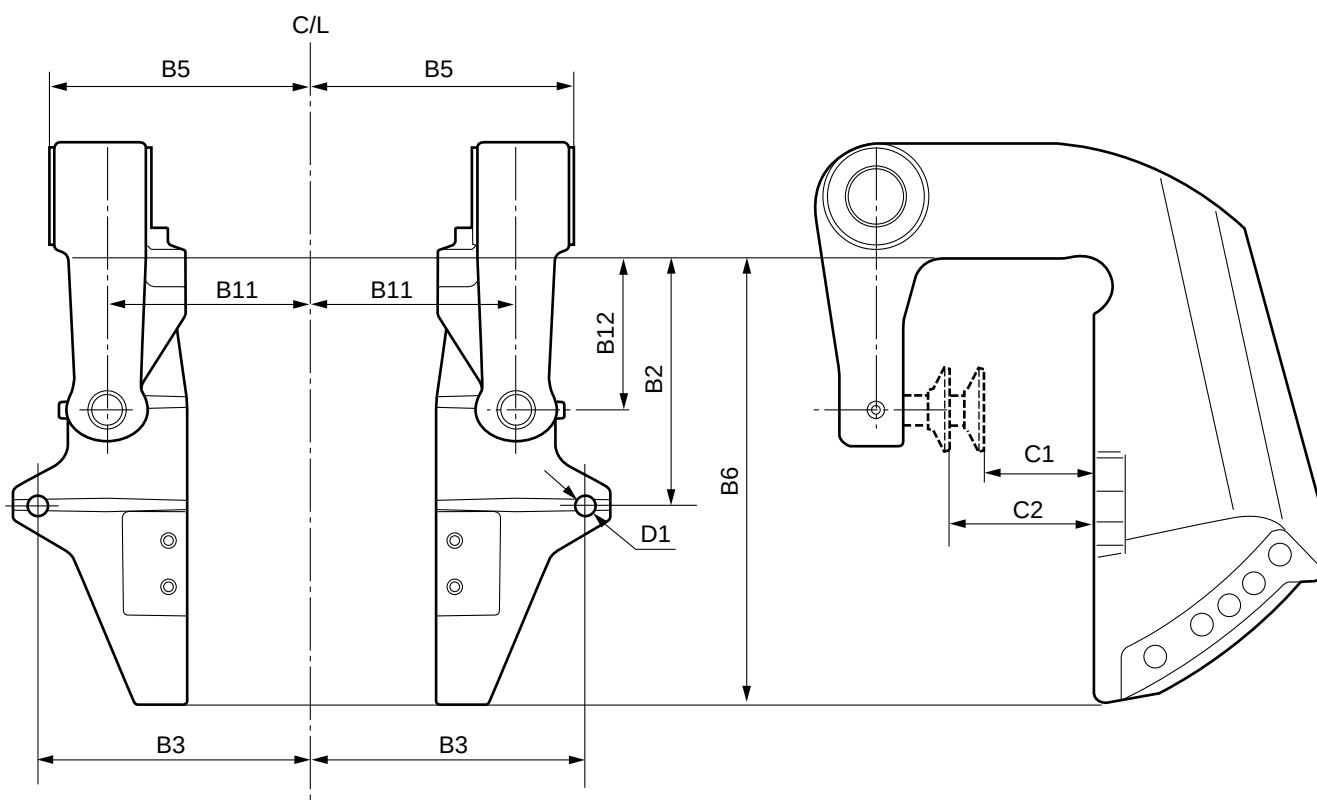


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	—	B8	—	C1	25 (1.0)	D1	8.3 (0.32)
B2	97.5 (3.8)	B9	—	C2	65 (2.6)	D2	—
B3	114.5 (4.5)	B10	—	C3	—	D3	—
B4	—	B11	87.5 (3.4)			D4	—
B5	122.5 (4.8)	B12	84 (3.3)				
B6	175 (6.9)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	E/40X	F25D						
US model		F25A						
Canada model		F25A						
Manual tilt								

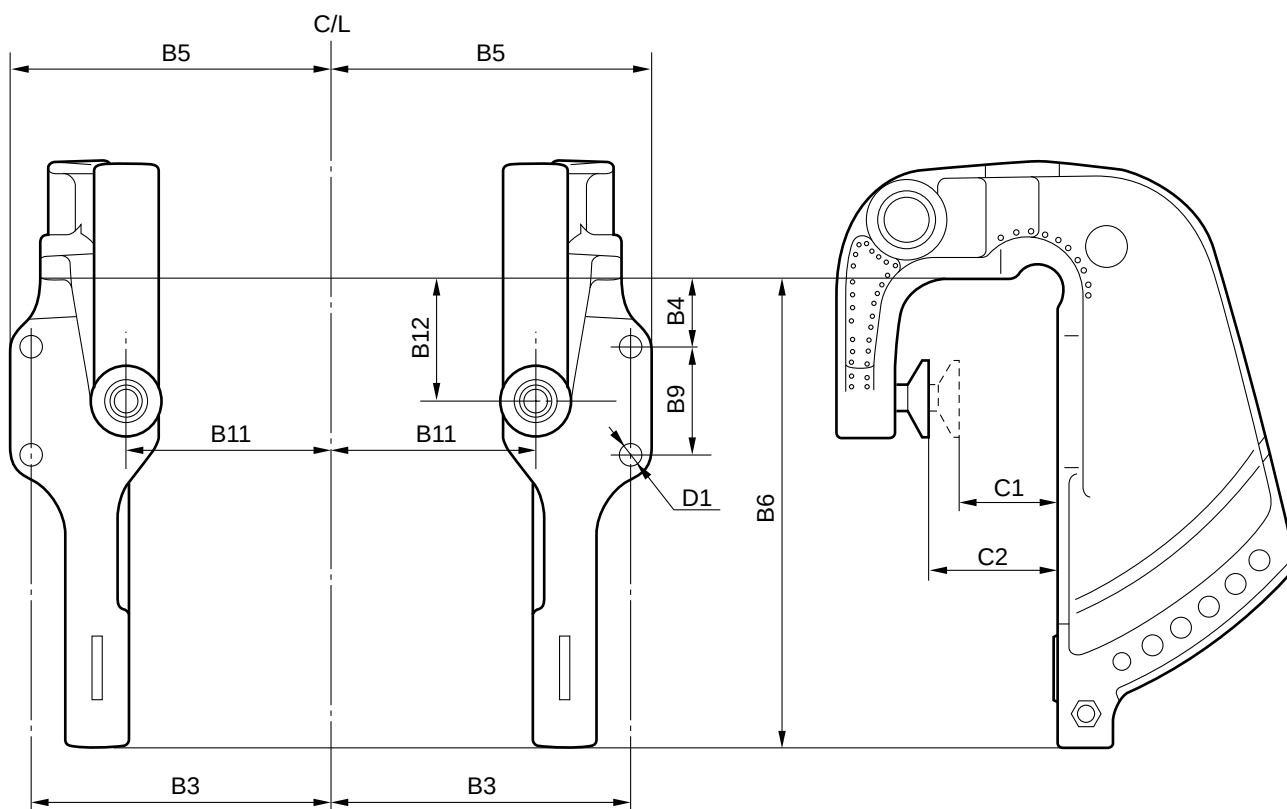


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	—	B8	—	C1	37 (1.5)	D1	10.5 (0.41)
B2	—	B9	50 (2.0)	C2	68 (2.7)	D2	—
B3	140 (5.5)	B10	—	C3	—	D3	—
B4	32 (1.3)	B11	95.5 (3.8)			D4	—
B5	150 (5.9)	B12	57 (2.2)				
B6	218 (8.6)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	E40G	E/40J	EK40G	EK40J				
US model								
Canada model								
Manual tilt								

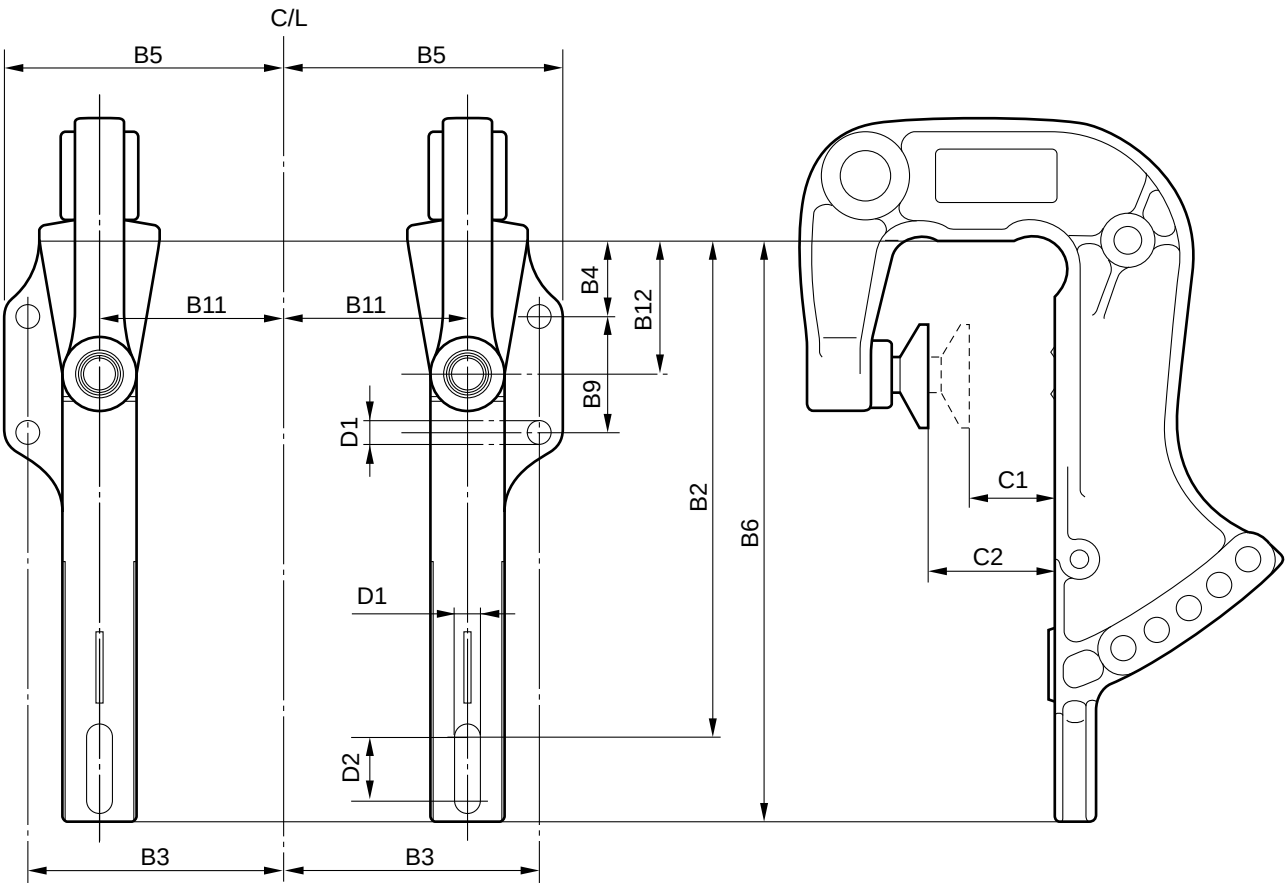


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	—	B8	—	C1	33 (1.3)	D1	10.5 (0.41)
B2	212 (8.3)	B9	50 (2.0)	C2	60 (2.3)	D2	27 (1.1)
B3	124.5 (4.9)	B10	—	C3	—	D3	—
B4	32 (1.3)	B11	93.5 (3.7)			D4	—
B5	134.5 (5.3)	B12	57 (2.2)				
B6	249 (9.8)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	30D	E/40X	F25D	FT25F	F30B	F40F	F20D	
US model			F25A	T25A		F40A		
Canada model			F25A	T25A	F30A	F40A		
PTT & Hydro-tilt								

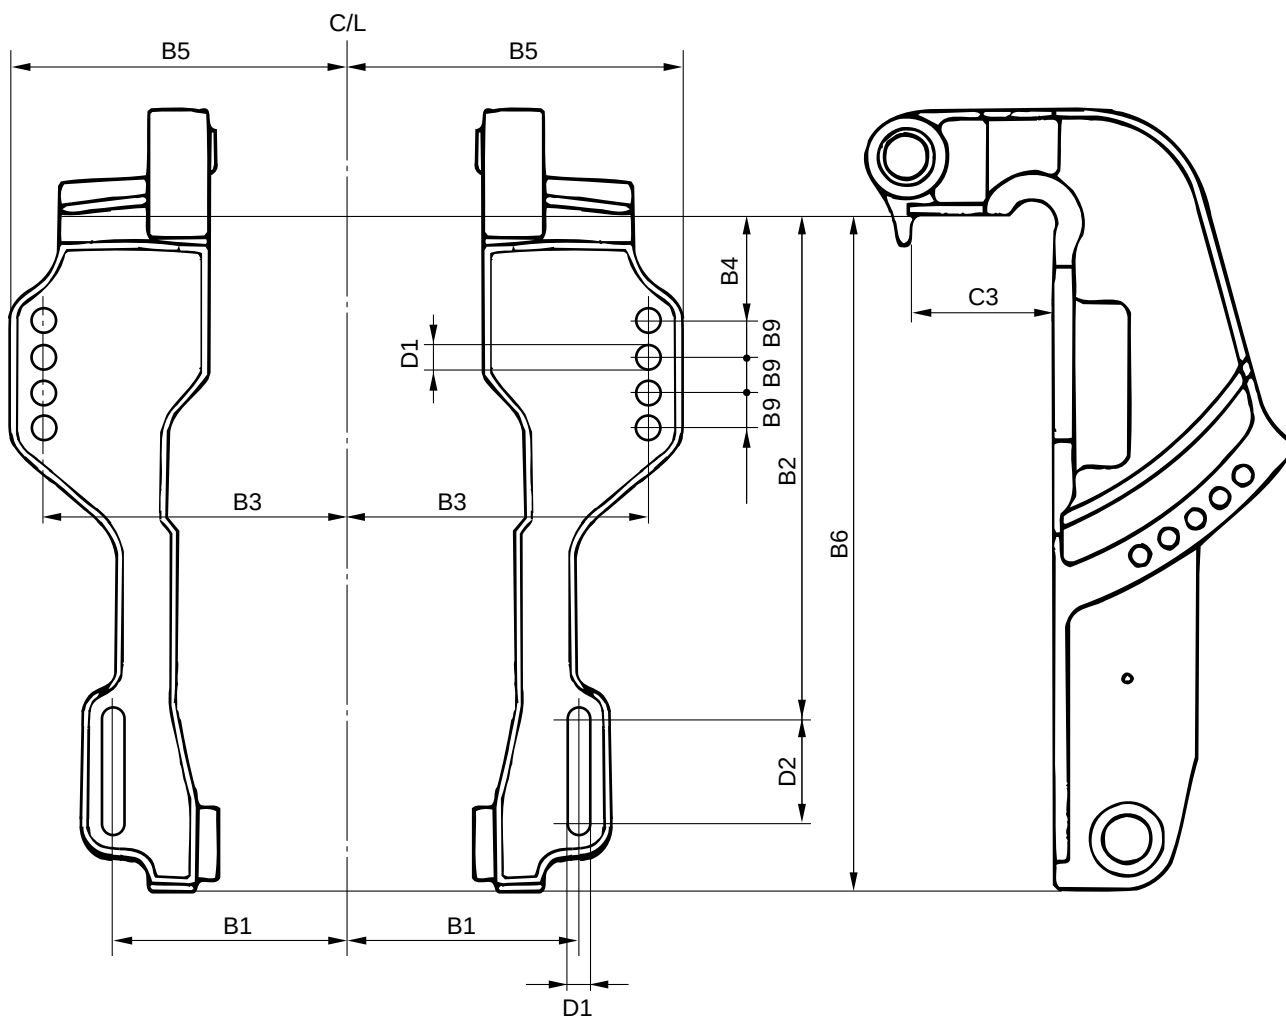


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	126 (5.0)	B8	—	C1	—	D1	13 (0.5)
B2	254 (10.0)	B9	18.5 (0.7)	C2	—	D2	55.5 (2.2)
B3	163.5 (6.4)	B10	—	C3	69 (2.7)	D3	—
B4	50.8 (2.0)	B11	—			D4	—
B5	180 (7.1)	B12	—				
B6	338 (13.3)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	F50F	FT50G	F60C	FT60D	F40D	F70A	F40G	
US model	F50	T50	F60	T60		F70A		
Canada model	F50A	T50A	F60A	T60A		F70A		
PTT & Hydro-tilt								

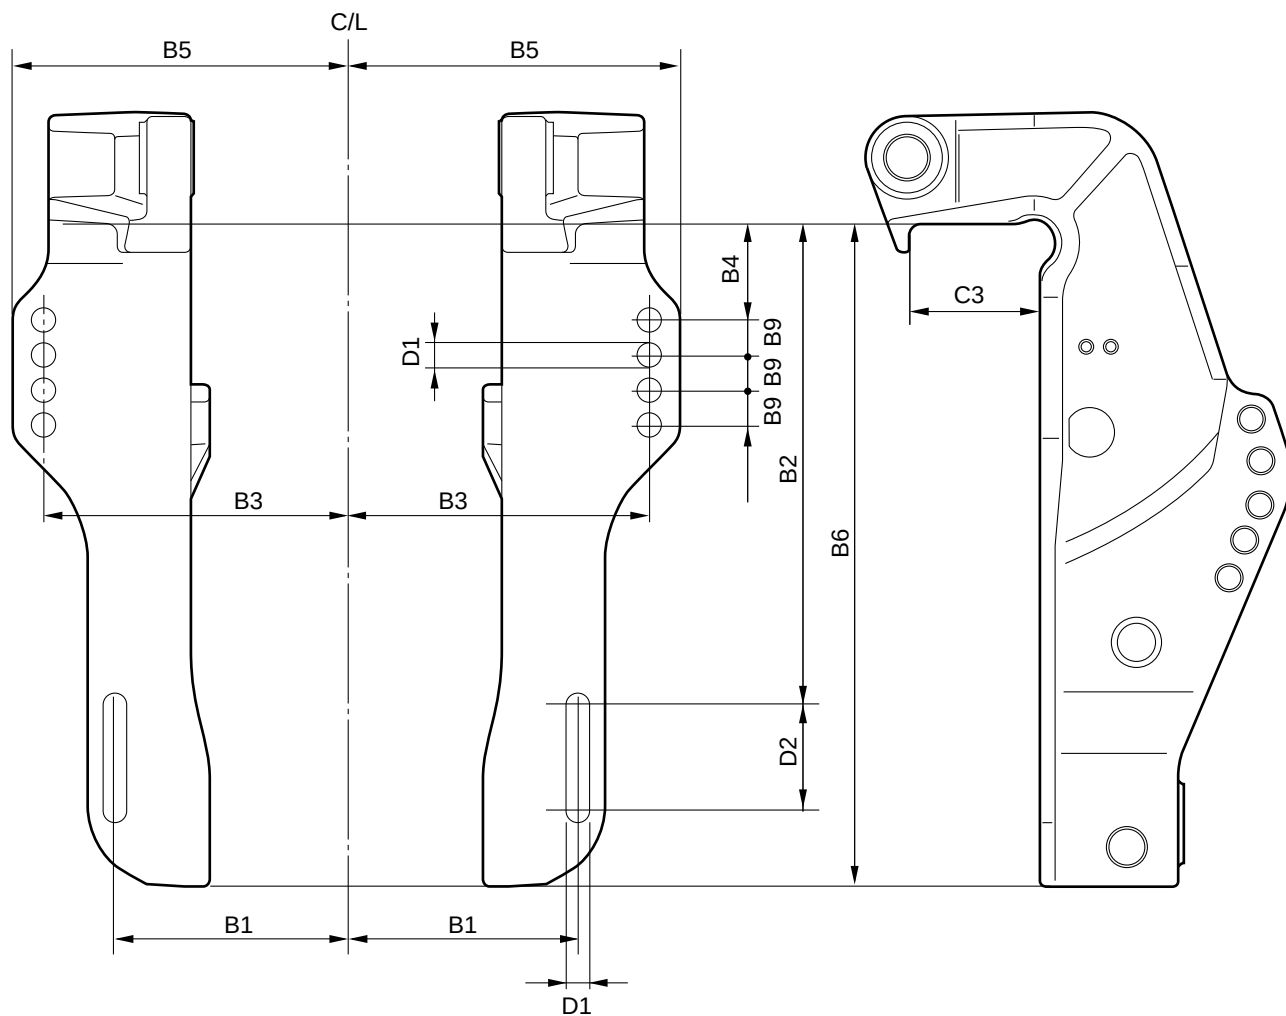


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	126 (5.0)	B8	—	C1	—	D1	13 (0.5)
B2	254 (10.0)	B9	18.5 (0.7)	C2	—	D2	55.5 (2.2)
B3	163.5 (6.4)	B10	—	C3	69 (2.7)	D3	—
B4	50.8 (2.0)	B11	—			D4	—
B5	180 (7.1)	B12	—				
B6	350 (13.8)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	40V	50H	E60H	F50D	FT50C			
US model								
Canada model		50						
PTT & Hydro-tilt								

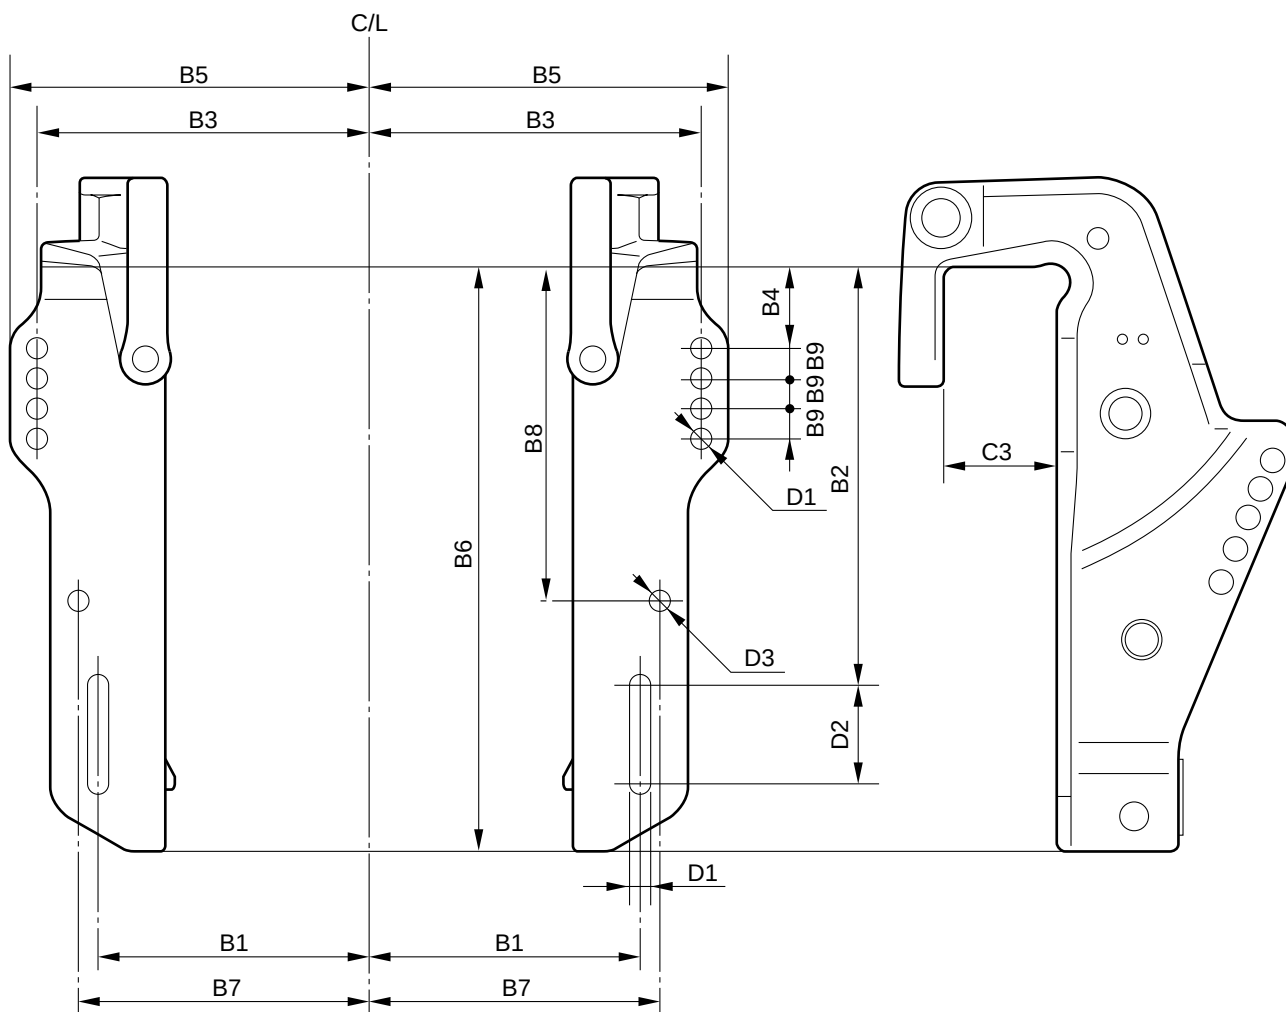


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	126 (5.0)	B8	203 (8.0)	C1	—	D1	13 (0.51)
B2	254 (10.0)	B9	18.5 (0.73)	C2	—	D2	60.5 (2.4)
B3	163.5 (6.4)	B10	—	C3	69 (2.7)	D3	13 (0.51)
B4	50.8 (2.0)	B11	—			D4	—
B5	180 (7.1)	B12	—				
B6	355 (14.0)						
B7	138 (5.4)						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	30D	40V	50H					
US model								
Canada model								
Manual tilt								

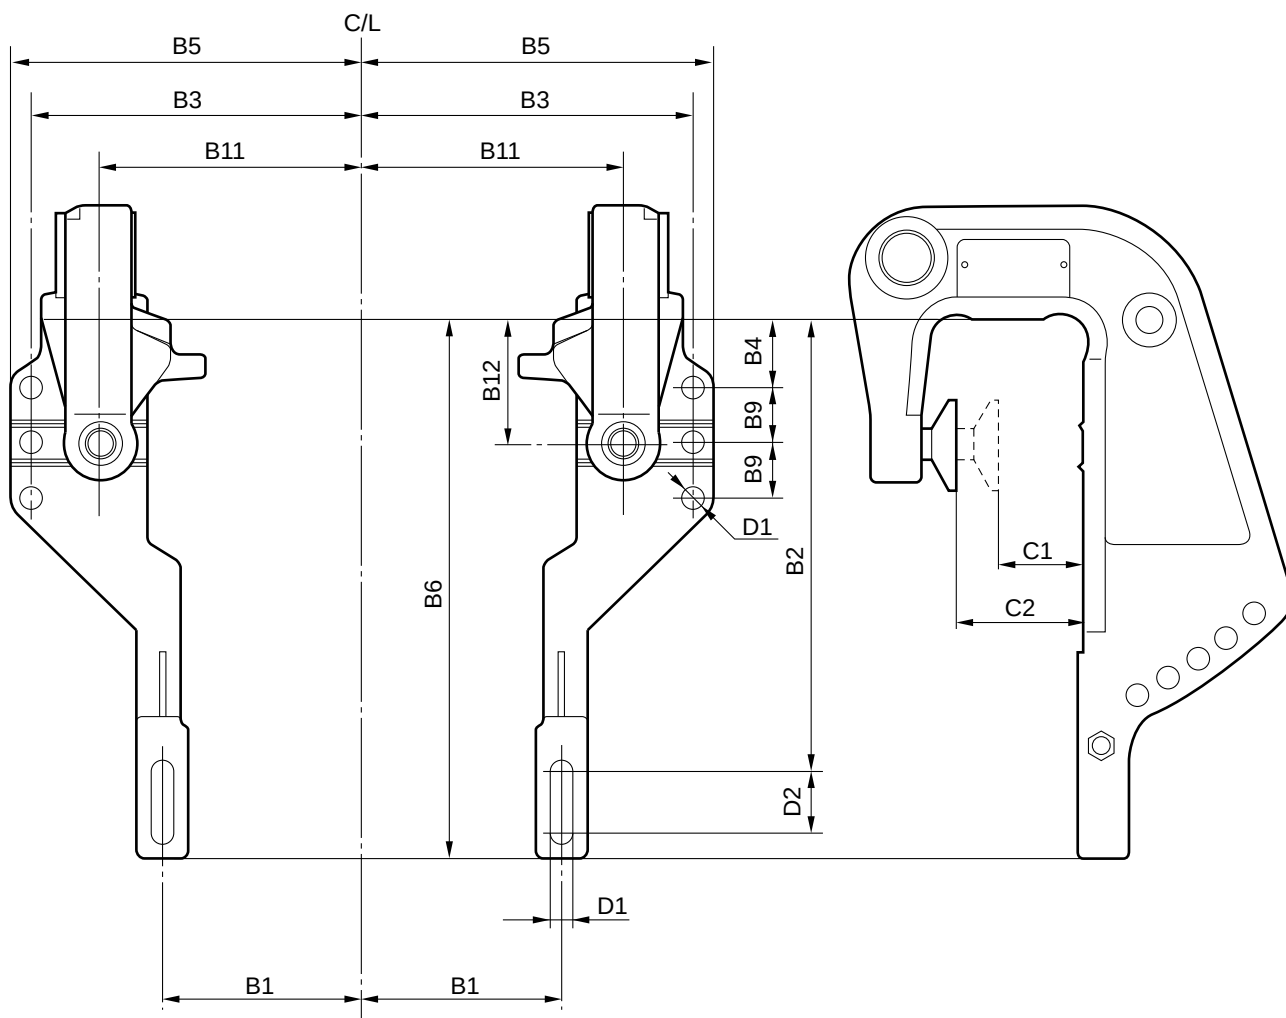


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	62.5 (2.5)	B8	—	C1	30 (1.2)	D1	10.5 (0.41)
B2	208 (8.2)	B9	25 (0.98)	C2	66 (2.6)	D2	26 (1.0)
B3	121.5 (4.8)	B10	—	C3	—	D3	—
B4	32 (1.3)	B11	90.5 (3.6)			D4	—
B5	131.5 (5.2)	B12	57 (2.2)				
B6	245 (9.6)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	E48C	E55C						
US model								
Canada model								
Manual tilt								

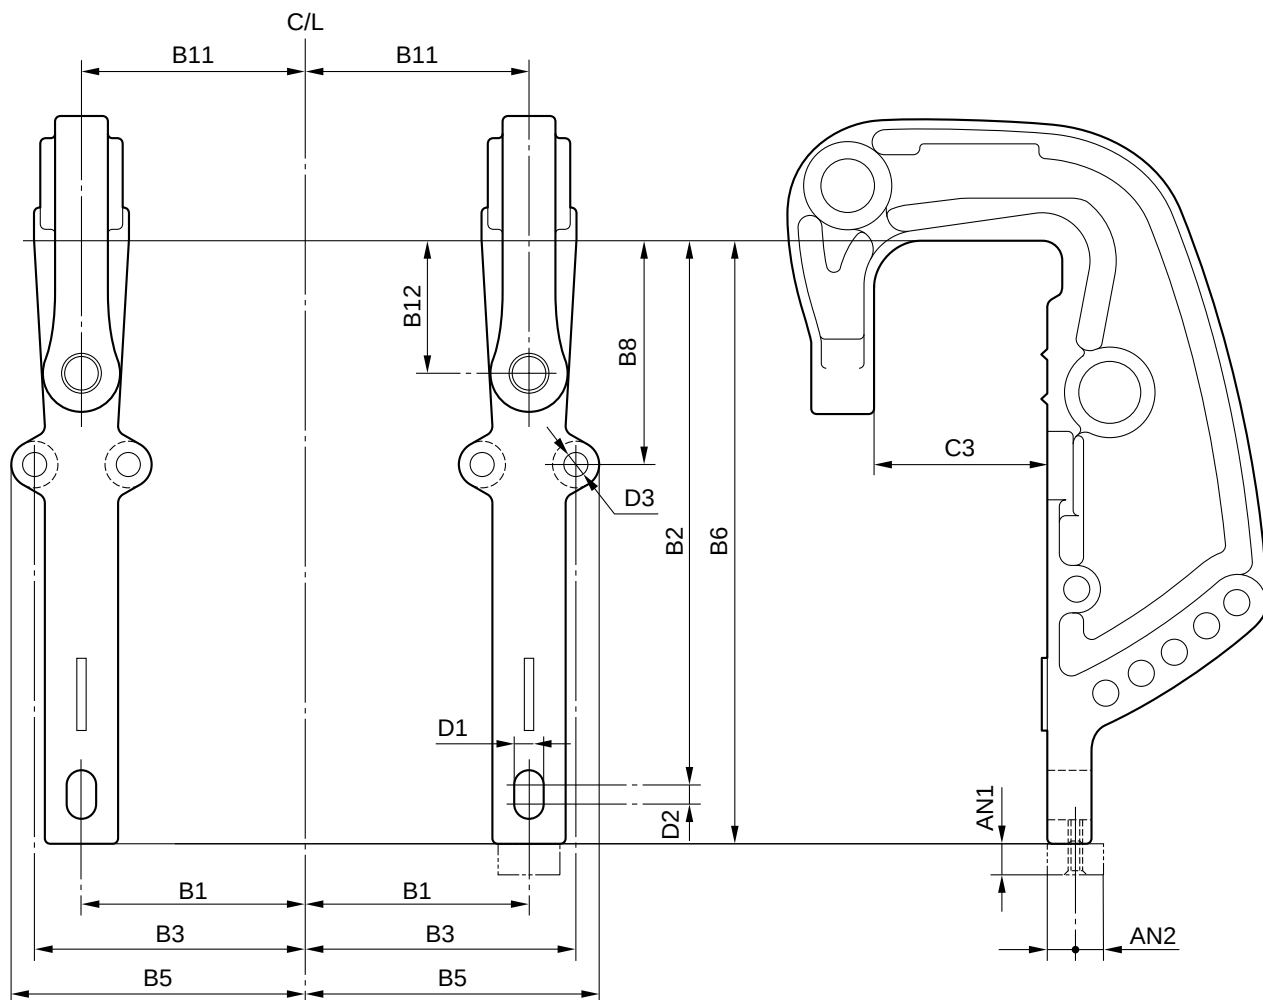


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	96 (3.8)	B8	95 (3.7)	C1	—	AN1	14 (0.55)
B2	230 (9.1)	B9	—	C2	—	AN2	12 (0.47)
B3	119 (4.7)	B10	—	C3	73 (2.9)		
B4	—	B11	96 (3.8)	D1	12 (0.47)		
B5	129 (5.1)	B12	57 (2.2)	D2	8 (0.31)		
B6	254 (10.0)			D3	10.5 (0.41)		
B7	—			D4	—		

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	55B	60F	E60H					
US model								
Canada model								
PTT & Hydro-tilt for S-transom								

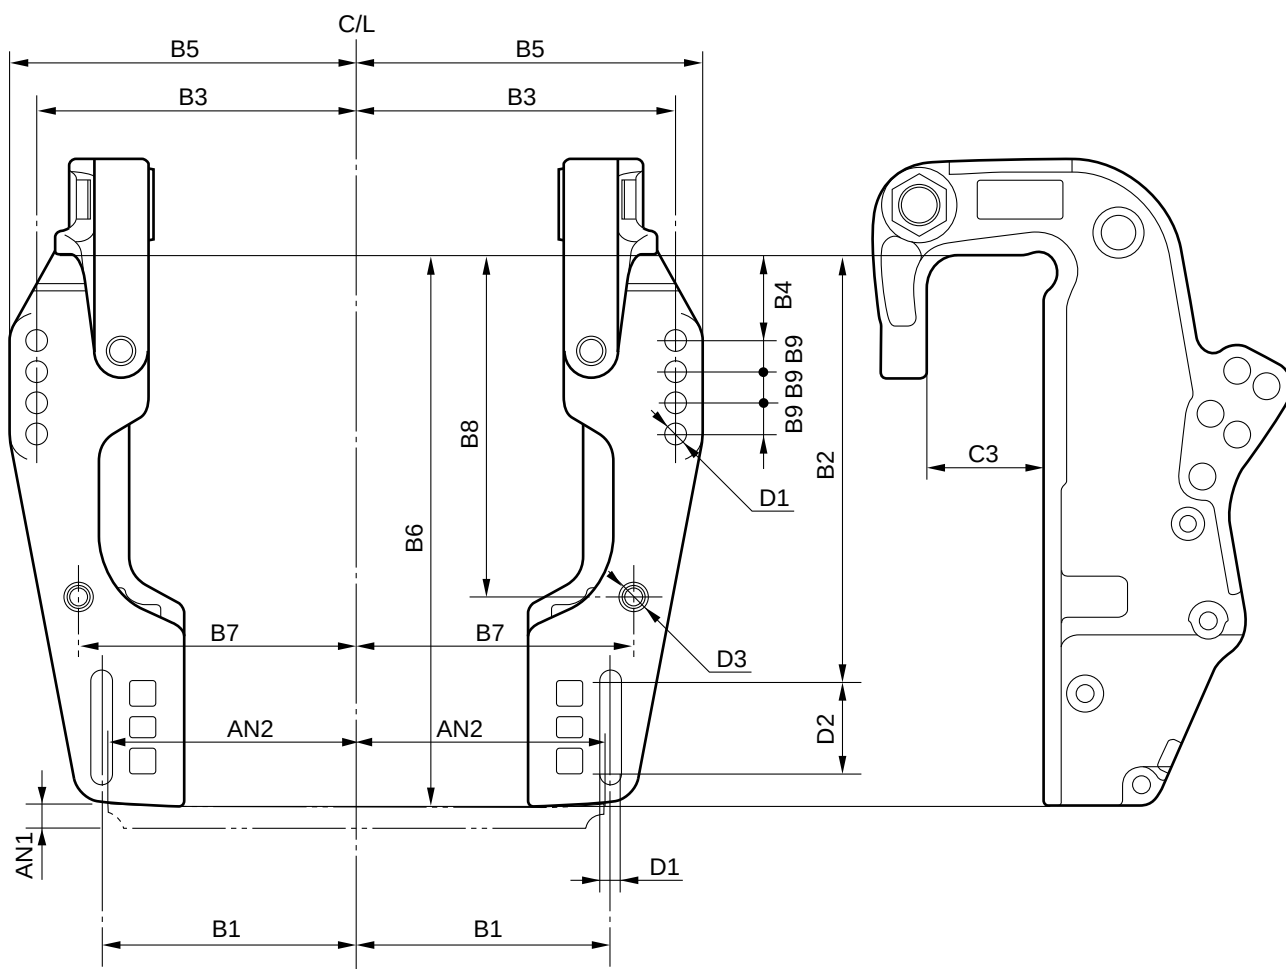


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	203.2 (8.0)	C1	—	D1	13 (0.51)
B2	254 (10.0)	B9	18.5 (0.73)	C2	—	D2	55.5 (2.2)
B3	163.5 (6.4)	B10	—	C3	68.5 (2.7)	D3	Studbolt hole: M12 × 1.25-40 deep
B4	50.8 (2.0)	B11	—			D4	—
B5	180 (7.1)	B12	—			AN1	19 (0.75)
B6	329 (13.0)					AN2	101.5 (4.0)
B7	138.1 (5.4)						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	55B	55D	60F	70B	75A	75C	85A	
US model								
Canada model								
Global model	90A	E60H	E60J	E65A	E75B			
US model								
Canada model	90							
PTT & Hydro-tilt for L/X-transom								

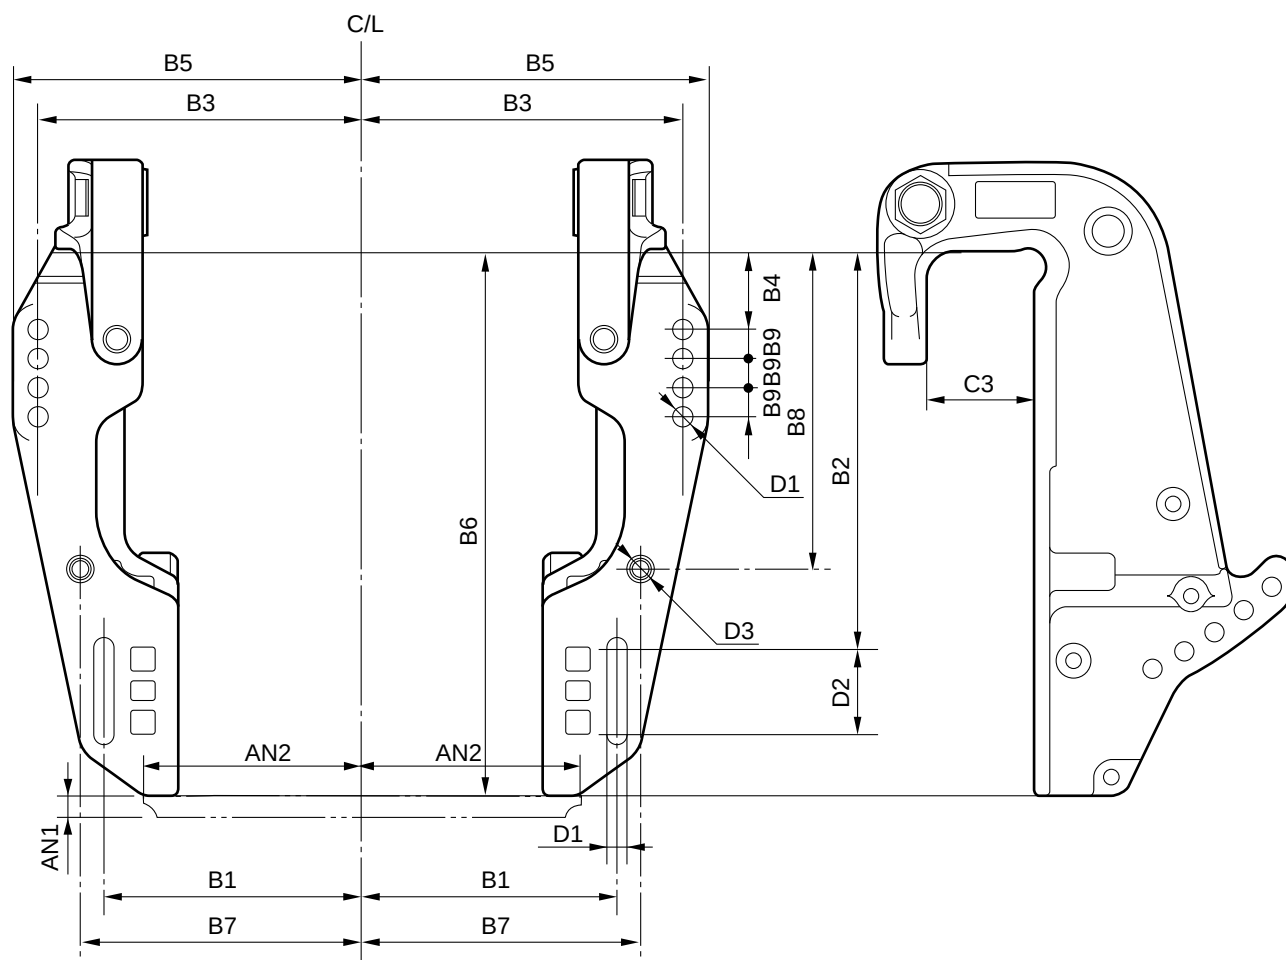


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	203.2 (8.0)	C1	—	D1	13 (0.51)
B2	254 (10.0)	B9	18.5 (0.73)	C2	—	D2	55.5 (2.2)
B3	163.5 (6.4)	B10	—	C3	68.5 (2.7)	D3	Studbolt hole: M12 × 1.25-40 deep
B4	50.8 (2.0)	B11	—			D4	—
B5	180 (7.1)	B12	—			AN1	19 (0.75)
B6	352 (13.9)					AN2	101.5 (4.0)
B7	138.1 (5.4)						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	F75B	F80B	F90B	F100D				
US model	F75		F90					
Canada model	F75A		F90A					
PTT								

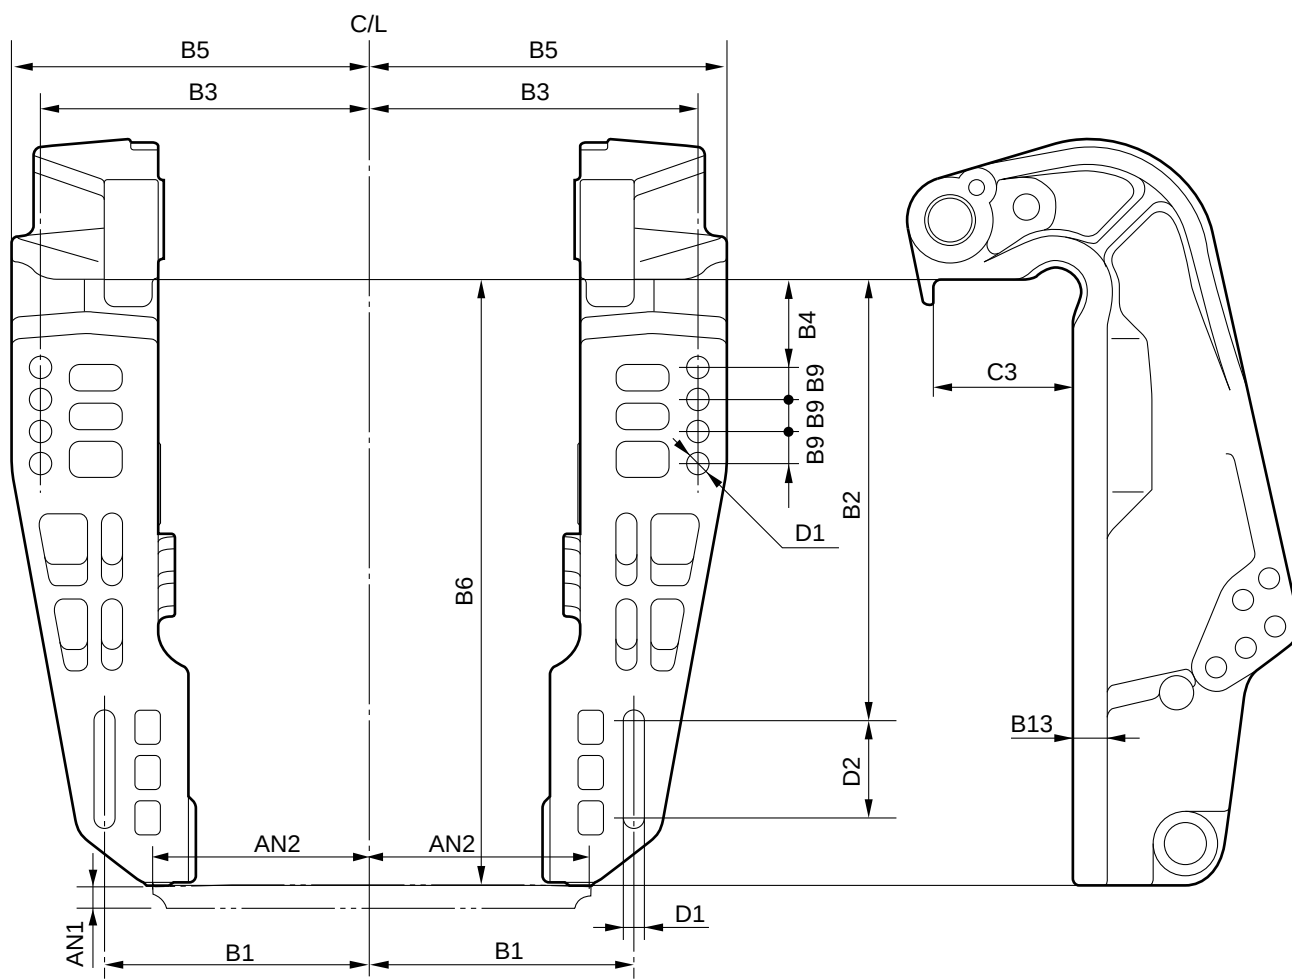


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	—	C1	—	AN1	19 (0.75)
B2	254 (10.0)	B9	18.5 (0.73)	C2	—	AN2	101.5 (4.0)
B3	163.5 (6.4)	B10	—	C3	80 (3.1)		
B4	50.8 (2.0)	B11	—	D1	13 (0.51)		
B5	180 (7.1)	B12	—	D2	55.5 (2.2)		
B6	368 (14.5)	B13	20 (0.79)	D3	—		
B7	—			D4	—		

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	E115A	115B	115C	130B	140B	L/150A	L/200A	150F
US model								
Canada model								
Global model	150G	200G	200F	225D	Z150P	Z150Q	Z175G	Z175H
US model						VZ150		VZ175
Canada model					Z150	VZ150		
Global model	Z/LZ200N	Z200P	F75C	F80C	F95A	F100B	F/FL115A	F/FL150A
US model	Z/LZ200						F/LF115A	F/LF150A
Canada model							F/LF115A	F/LF150A
Global model	F/FL150B	F225C						
US model								
Canada model								
PTT & Hydro tilt								

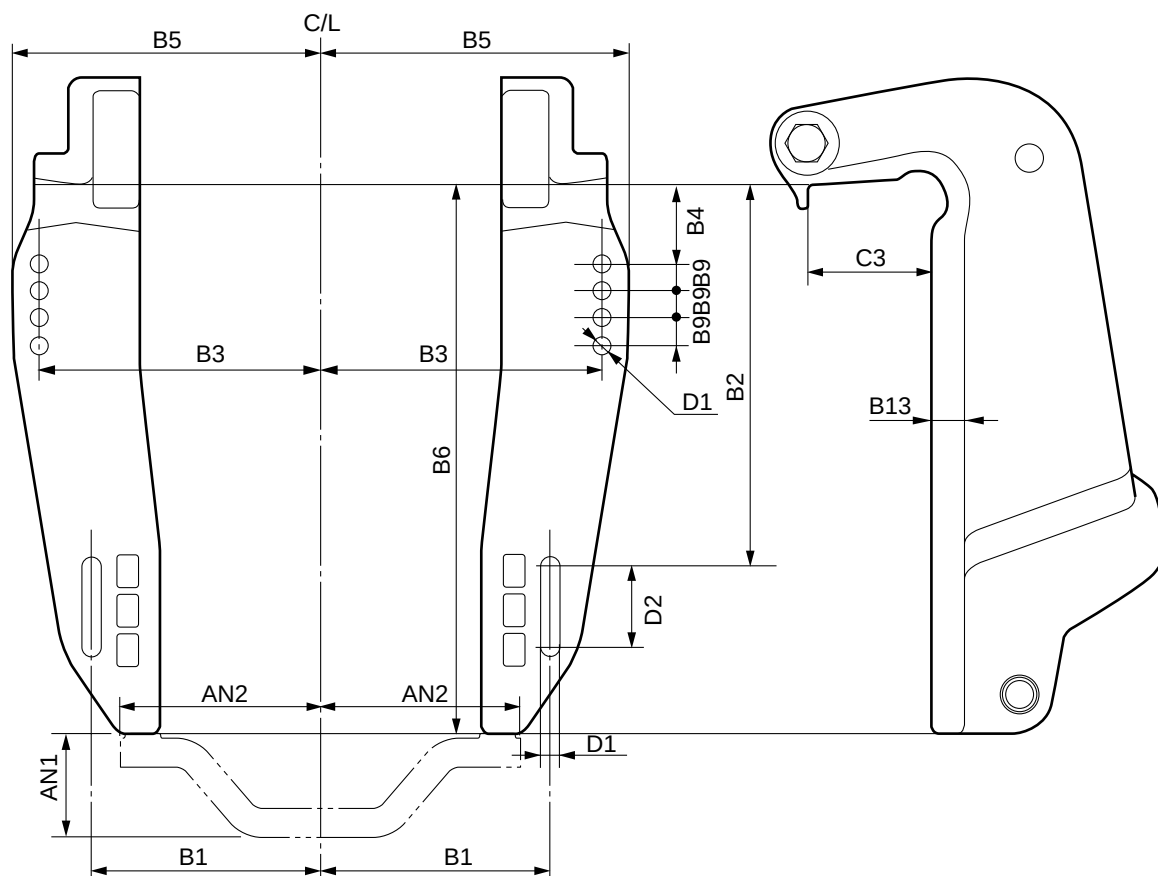


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	—	C1	—	AN1	52 (2.0)
B2	254 (10.0)	B9	18.5 (0.73)	C2	—	AN2	102 (4.0)
B3	163.5 (6.4)	B10	—	C3	82 (3.2)		
B4	50.8 (2.0)	B11	—	D1	13 (0.51)		
B5	180 (7.1)	B12	—	D2	55.5 (2.2)		
B6	367 (14.4)	B13	24 (0.94)	D3	—		
B7	—			D4	—		

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	F200D	F225D	F250C	F225G	F250F	F275A		
US model	VF200LA	VF225LA	VF250LA					
Canada model	VF200LA	VF225LA	VF250LA					
PTT								

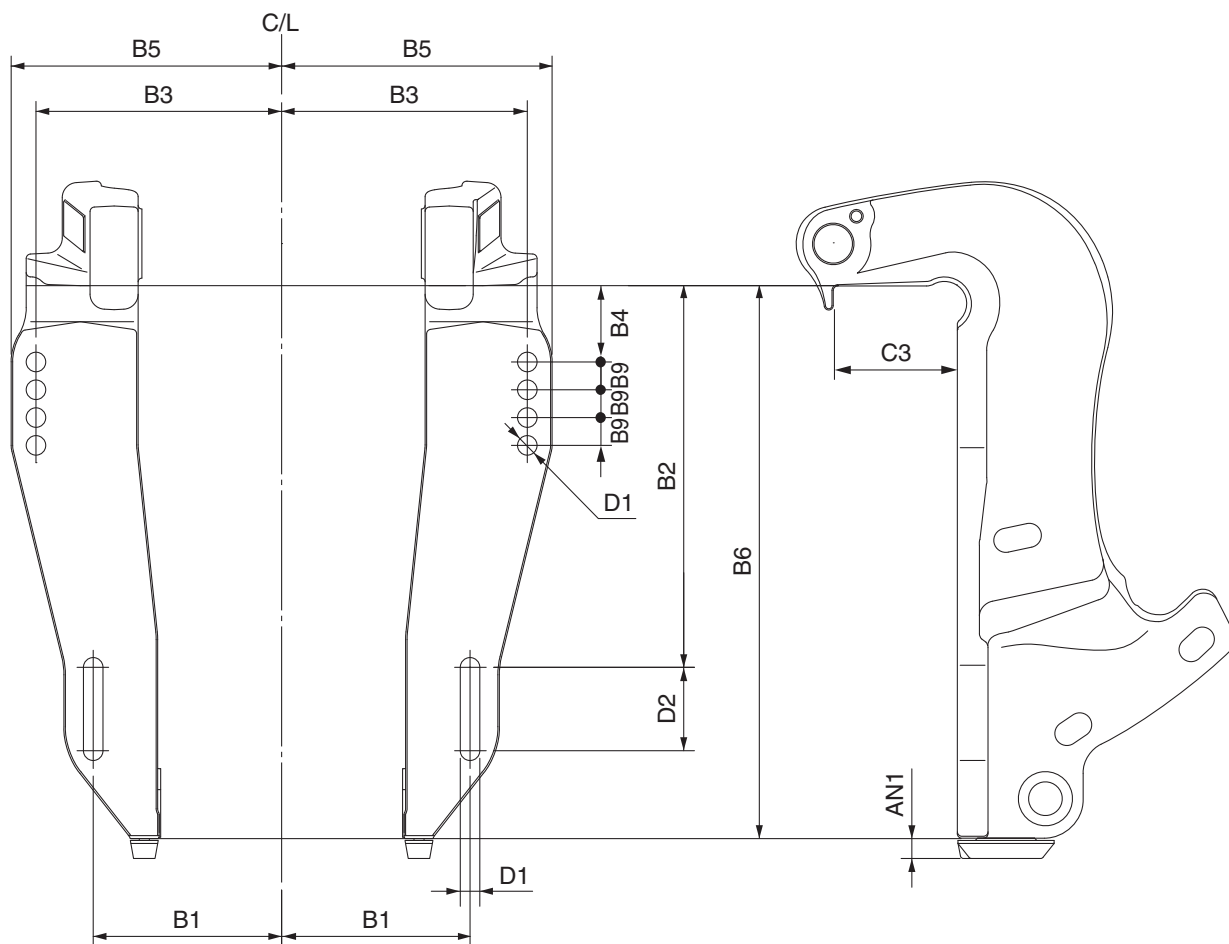


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	—	C1	—	AN1	13.5 (0.5)
B2	254 (10.0)	B9	18.5 (0.7)	C2	—	AN2	—
B3	163.5 (6.4)	B10	—	C3	82 (3.2)		
B4	50.8 (2.0)	B11	—	D1	13 (0.5)		
B5	180 (7.1)	B12	—	D2	55.5 (2.2)		
B6	368 (14.5)	B13	—	D3	—		
B7	—			D4	—		

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	L/250G	F/FL200B	F/FL200C	F/FL225B	F/FL250A	F/FL250G	F/FL225F	F/FL250D
US model			F/LF200A	F/LF225A	F/LF250		F/LF225CA	F/LF250CA
Canada model			F/LF200A				F/LF225CA	F/LF250CA
Global model	F/FL300B							
US model	F/LF300CA							
Canada model	F/LF300CA							
PTT								

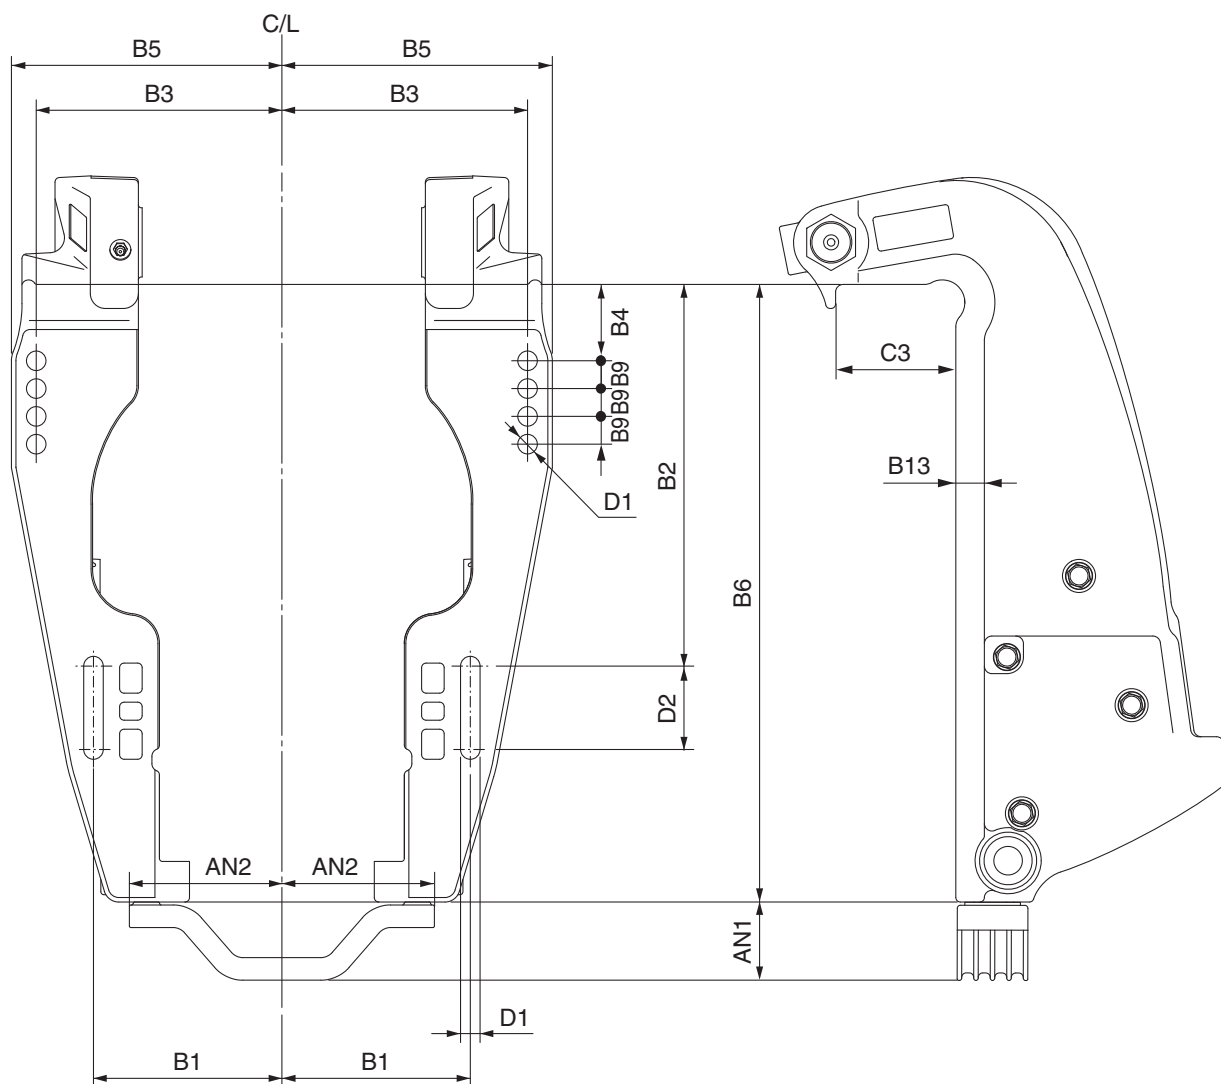


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	—	C1	—	AN1	52 (2.0)
B2	254 (10.0)	B9	18.5 (0.7)	C2	—	AN2	102 (4.0)
B3	163.5 (6.4)	B10	—	C3	79 (3.1)		
B4	50.8 (2.0)	B11	—	D1	13 (0.5)		
B5	180 (7.1)	B12	—	D2	55.5 (2.2)		
B6	411 (16.2)	B13	20 (0.79)	D3	—		
B7	—			D4	—		

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	F/FL300A	F/FL350A						
US model		F/LF350CA						
Canada model		F/LF350CA						
PTT								

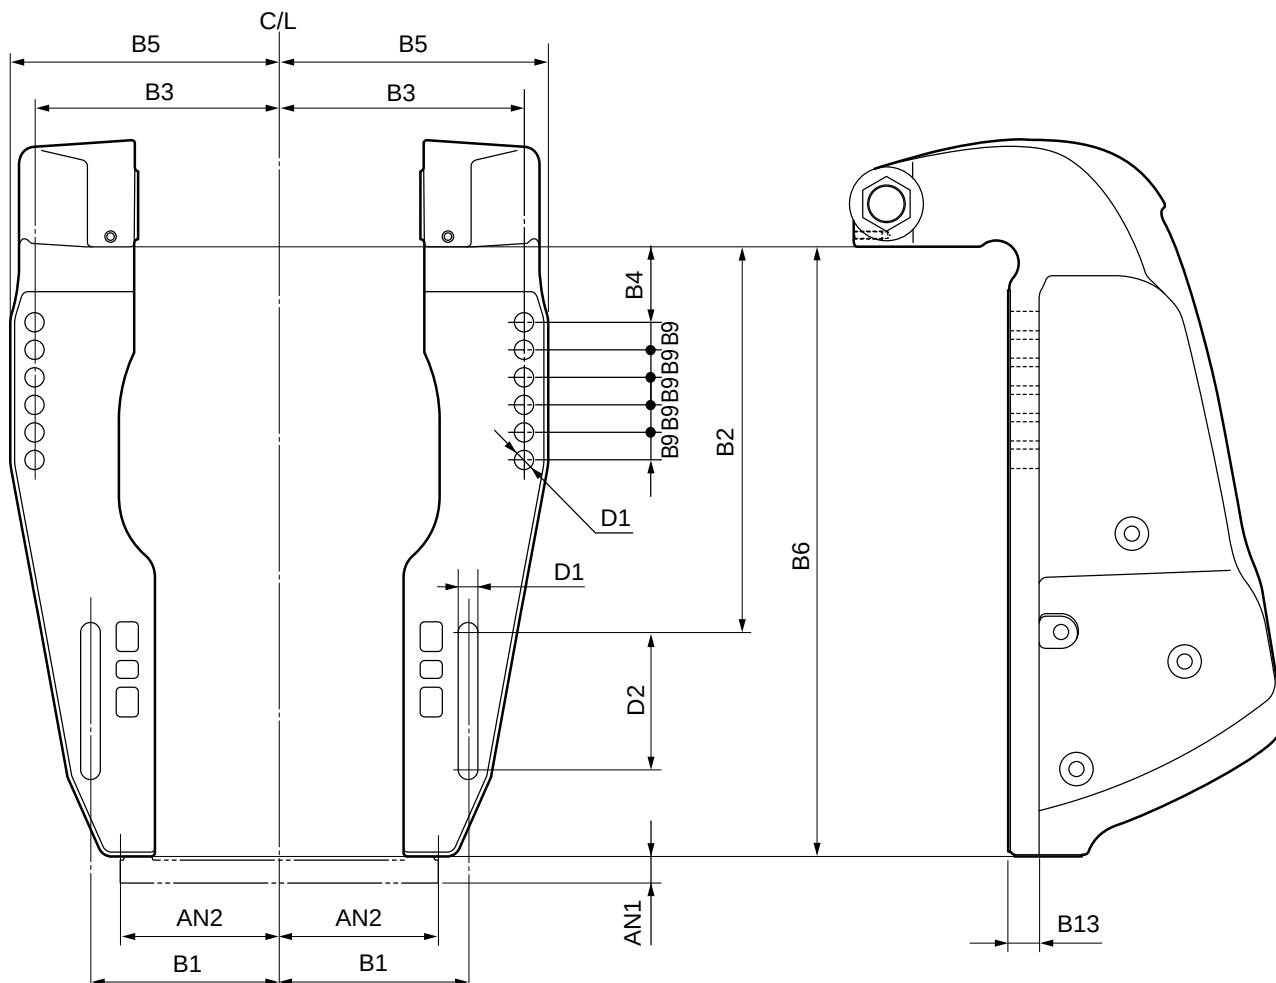

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	—	C1	—	AN1	19 (0.75)
B2	254 (10.0)	B9	18.5 (0.73)	C2	—	AN2	102 (4.0)
B3	163.5 (6.4)	B10	—	C3	—		
B4	50.8 (2.0)	B11	—	D1	13 (0.51)		
B5	180 (7.1)	B12	—	D2	92.6 (3.6)		
B6	406 (16.0)	B13	21 (0.83)	D3	—		
B7	—			D4	—		